

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
5915

Total Pages in this Submission  
3

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

TELEVISION TERMINAL DATA STORAGE

and invented by:

John S. HENDRICKS et al.

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information: \_

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No.: 07/991,074 and

Which is a: 08/160,194

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 07/991,074

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 50 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

5915

Total Pages in this Submission

3

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets 20
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☒ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☐ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☒ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class                      ☐ Express Mail *(Specify Label No.):* \_\_\_\_\_

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

5915

Total Pages in this Submission

3

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Additional Enclosures (please identify below):

--

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	56	- 20 =	36	x \$18.00	\$648.00
Indep. Claims	5	- 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,564.00

- ☒ A check in the amount of **\$1,564.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **04-1425** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature

Dated: September 14, 1999

Matthew C. Phillips  
Registration No. 43,403  
DORSEY & WHITNEY LLP  
1001 Pennsylvania Avenue N.W.  
Suite 300 South  
Washington, D.C. 20004  
(202)824-8800

CC:

**TELEVISION TERMINAL DATA STORAGE**

**RELATED APPLICATIONS**

This application is a Divisional of Application Serial No. 07/991,074, filed December 9, 1992, entitled TELEVISION PROGRAM PACKAGING AND DELIVERY SYSTEM WITH MENU DRIVEN SUBSCRIBER ACCESS and Application Serial No. 08/160,194, filed December 2, 1993, entitled ADVANCED SET TOP TERMINAL FOR CABLE TELEVISION DELIVERY SYSTEMS, which is a continuation-in-part of the above-mentioned Application Serial No. 07/991,074.

The following other related applications are continuation-in-part applications, also based on the above-referenced 07/991,074 patent application and filed on December 2, 1993: Serial No. 08/160,281, entitled REPROGRAMMABLE TERMINAL FOR SUGGESTING PROGRAMS OFFERED ON A TELEVISION PROGRAM DELIVERY SYSTEM, now U.S. Patent No. 5,798,785; Serial No. 08/160,280, entitled NETWORK CONTROLLER FOR CABLE TELEVISION DELIVERY SYSTEMS, now U.S. Patent No. 5,600,364; Serial No. 08/160,282, entitled AN OPERATIONS CENTER FOR A TELEVISION PROGRAM PACKAGING AND DELIVERY SYSTEM, now U.S. Patent No. 5,659,350; Serial No. 08/160,193, entitled SET TOP TERMINAL FOR CABLE TELEVISION DELIVERY SYSTEMS, now U.S. Patent No. 5,734,853; Serial No. 08/160,283, entitled DIGITAL CABLE HEADEND FOR CABLE TELEVISION DELIVERY SYSTEM, now U.S. Patent No. 5,682,195; and Serial No. 08/160,191, entitled TELEVISION PROGRAM DELIVERY SYSTEM, now U.S. Patent No. 5,559,549.

All of the above listed patent applications and patents are hereby incorporated by reference.

**TECHNICAL FIELD**

The invention relates to television entertainment systems for providing television programming to consumer homes. More particularly, the invention relates to a terminal for use

1 with a program delivery system. Even more particularly, the invention relates to providing data  
2 storage and retrieval on such a terminal.

#### 3 4 BACKGROUND OF THE INVENTION

5 Advances in television entertainment have been primarily driven by breakthroughs in  
6 technology. In 1939, advances on Vladmir Zworykin's picture tube provided the stimulus for  
7 NBC to begin its first regular broadcasts. In 1975, advances in satellite technology provided  
8 consumers with increased programming to homes.

9 Many of these technology breakthroughs have produced inconvenient systems for  
10 consumers. One example is the ubiquitous three remote control home, having a separate and  
11 unique remote control for the TV, cable box and VCR. More recently, technology has provided  
12 cable users in certain parts of the country with 100 channels of programming. This increased  
13 program capacity is beyond the ability of many consumers to use effectively. No method of  
14 managing the program choices has been provided to consumers.

15 Consumers are demanding that future advances in television entertainment, particularly  
16 programs and program choices, be presented to the consumer in a user friendly manner.  
17 Consumer preferences, instead of technological breakthroughs, will drive the television  
18 entertainment market for at least the next twenty years. As computer vendors have experienced  
19 a switch from marketing new technology in computer hardware to marketing better useability,  
20 interfaces and service, the television entertainment industry will also experience a switch from  
21 new technology driving the market to consumer useability driving the market.

22 Consumers want products incorporating new technology that are useful, and will no  
23 longer purchase new technology for the sake of novelty or status. Technological advances in  
24 sophisticated hardware are beginning to surpass the capability of the average consumer to use the  
25 new technology. Careful engineering must be done to make entertainment products incorporating  
26 new technology useful and desired by consumers.

27 In order for new television entertainment products to be successful, the products must  
28 satisfy consumer demands. TV consumers wish to go from limited viewing choices to a variety  
29 of choices, from no control of programming to complete control. Consumers wish to advance

1 from cumbersome and inconvenient television to easy and convenient television and keep costs  
2 down. Consumers do not wish to pay for one hundred channels when due to lack of  
3 programming information, they seldom, if ever, watch programming on many of these channels.

4 The concepts of interactive television, high definition television and 300 channel cable  
5 systems in consumer homes will not sell if they are not packaged, delivered and presented in a  
6 useable fashion to consumers. The problem is that TV programming is not being delivered and  
7 presented to consumers in a user friendly manner.

8 Consumers are already being bombarded with programming options, numerous "free"  
9 cable channels, subscription cable channels and pay-per-view choices. Any further increase in  
10 TV entertainment choices, without a user friendly presentation and approach, will likely bewilder  
11 viewers with a mind-numbing array of choices.

12 The TV industry has traditionally marketed and sold its programs to consumers in bulk,  
13 such as continuous feed broadcast and long-term subscriptions to movie channels. The TV  
14 industry is unable to sell its programming in large quantities on a unit per unit basis, such as the  
15 ordering of one program. Consumers prefer a unit sales approach because it keeps costs down  
16 and allows the consumer to be more selective in their viewing.

17 In addition, viewership fragmentation, which has already begun, will increase.  
18 Programming not presented in a user friendly manner will suffer with a decrease in viewership  
19 and revenue. As programming presentation becomes more user friendly, users seek additional  
20 features and functional capabilities.

21 What is needed is a set top converter with enhanced functionality.

22 What is needed is a set top converter that provides users with advanced features and  
23 capabilities.

24 What is needed is technology that upgrades the functionality of existing set top  
25 converters.

26 What is needed is hardware that provides an upgrade capability allowing the use of  
27 existing set top converter technology in advanced program delivery systems.

28 What is needed is a set top converter that provides an upstream communications  
29 capability between the set top converter and cable headend.

1           What is needed is a set top converter that provides a capability of generating menus for  
2 display.

3           What is needed is a set top converter that provides a simple way to select a program from  
4 a menu.

5           Certain embodiments of the present invention are capable of fulfilling these needs.  
6

## 7 SUMMARY OF INVENTION

8           In one respect, the present invention is a hardware upgrade for a terminal for use with a  
9 television program delivery system. The hardware upgrade comprises an interface to the terminal  
10 and a disc storage device, such as a CD-ROM, for example, connected to the interface. The disc  
11 storage device may contain data concerning games, education, encyclopedias, reference  
12 information, economics, and the like. Optionally, the terminal may receive programming  
13 instructions to retrieve the data stored on the disc.

14           In another aspect, the present invention is a terminal for use with a television program  
15 delivery system. The terminal comprises a receiver adapted to receive programs and a first  
16 hardware upgrade, which comprises an interface to the terminal and a disc storage device  
17 connected to the interface. One or more additional hardware upgrades may be connected to the  
18 terminal, preferably in a daisy-chain arrangement, such as a SCSI daisy-chain.

19           In another aspect, the present invention is a system comprising a terminal and a television  
20 program delivery system adapted to deliver television program signals. The terminal comprises  
21 a receiver adapted to receive at least some of the television program signals and a hardware  
22 upgrade, which comprises an interface to the terminal and a disc storage device connected to the  
23 interface. The system is preferably a cable television program delivery system.

24           In another aspect, the present invention is a television terminal comprising a television  
25 program receiver, a disc storage device; and an output connected to the receiver and the disc  
26 storage device, wherein the output accepts television program signals from the receiver and data  
27 signals from the disc storage device. The output may be, for example, a video display.

28           In yet another aspect, the present invention is a method comprising the steps of receiving  
29 a television program, accessing data on a disc storage device, and displaying the television

1 program and/or information based on the accessed data. The data may concern games, education,  
2 encyclopedias, reference information, economics, and the like. Optionally, the terminal may  
3 receive programming instructions, in a vertical blanking interval or a program control  
4 information signal, to retrieve the data stored on the disc.

5 Advantages of the invention will become obvious to those skilled in the art upon review  
6 of the following description, the attached drawings and appended claims.

## 7 8 DESCRIPTION OF THE DRAWINGS

9 Figure 1 is a diagram of the primary components of the television delivery system.

10 Figure 2 is a schematic of the operation of the primary components of the system.

11 Figure 3 is a block diagram of the hardware components of the set top terminal.

12 Figure 4 is a perspective front view of a set top terminal.

13 Figure 5 is a perspective rear view of a set top terminal.

14 Figure 6 is a block diagram of a Turbo card upgrade for a set top terminal.

15 Figure 7a is a drawing of a frame format for program control information signal.

16 Figure 7b is a drawing of a frame format for a polling response from the set top terminal.

17 Figure 8 is a drawing of the basic menus used in the present invention, including the ten  
18 major menus represented by icons.

19 Figure 9a is a schematic of a basic decompression box with upgrade module and  
20 associated connections.

21 Figure 9b is a schematic of an alternative embodiment of a simple decompression box  
22 with upgrade module and associated connections.

23 Figure 10 is a more detailed block diagram of the components of a simple decompression  
24 box with upgrade module.

25 Figure 11 is a schematic of the set top terminal's upstream data transmission hardware.

26 Figure 12a is a schematic showing the components of the Level A, B, and C hardware  
27 upgrades.

28 Figure 12b is a schematic showing the components of the Level D hardware upgrade.



1 Figure 13 is a drawing of an interactive television promotional menu for a set top terminal  
2 hardware upgrade.

3 Figures 14a and 14b are drawings of submenus for interactive television services using  
4 hardware upgrade Level A.

5 Figures 15a through 15d are drawings of interactive services using hardware upgrade  
6 Level B, which are related to on-screen airline reservations.

## 7 8 DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

### 9 10 A. Television Program Delivery System Description

#### 11 1. Introduction

12 Figure 1 shows the present invention as part of an expanded cable television program  
13 delivery system 200 that dramatically increases programming capacity using compressed  
14 transmission of television program signals. Developments in digital bandwidth compression  
15 technology now allow much greater throughput of television program signals over existing or  
16 slightly modified transmission media. The program delivery system 200 shown provides  
17 subscribers with a user friendly interface to operate and exploit a six-fold or more increase in  
18 current program delivery capability.

19 Subscribers are able to access an expanded television program package and view selected  
20 programs through a menu-driven access scheme that allows each subscriber to select individual  
21 programs by sequencing a series of menus. The menus are sequenced by the subscriber using  
22 simple alpha-numeric and iconic character access or moving a cursor or highlight bar on the TV  
23 screen to access desired programs by simply pressing a single button, rather than recalling from  
24 memory and pressing the actual two or more digit numeric number assigned to a selection. Thus,  
25 with the press of a single button, the subscriber can advance from one menu to the next. In this  
26 fashion, the subscriber can sequence the menus and select a program from any given menu. The  
27 programs are grouped by category so that similar program offerings are found on the same menu.

## 2. Major System Components

In its most basic form, the system uses a program delivery system 200 in conjunction with a conventional concatenated cable television system 210. The program delivery system 200 generally includes (i) at least one operations center 202, where program packaging and control information are created and then assembled in the form of digital data, (ii) a digital compression system, where the digital data is compressed, combined/multiplexed, encoded, and mapped into digital signals for satellite transmission to the cable headend 208, and (iii) a set of in-home decompressors. The program delivery system 200 transports the digital signals to the cable headend 208 where the signals are transmitted through a concatenated cable television system 210. Within the cable headend 208, the received signals may be decoded, demultiplexed, managed by a local central distribution and switching mechanism, combined and then transmitted to the set top terminal 220 located in each subscriber's home over the cable system 210. Although concatenated cable systems 210 are the most prevalent transmission media to the home, telephone lines, cellular networks, fiber optics, Personal Communication Networks and similar technology for transmitting to the home can be used interchangeably with this program delivery system 200.

The delivery system 200 has a reception region 207 with an in-home decompression capability. This capability is performed by a decompressor housed within a set top terminal 220 in each subscriber's home. The decompressor remains transparent from the subscriber's point of view and allows any of the compressed signals to be demultiplexed and individually extracted from the composite data stream and then individually decompressed upon selection by the subscriber. The decompressed video signals are converted into analog signals for television display. Such analog signals include NTSC formatted signals for use by a standard television. Control signals are likewise extracted and decompressed and then either executed immediately or placed in local storage such as a RAM. Multiple sets of decompression hardware may be used to decompress video and control signals. The set top terminal 220 may then overlay or combine different signals to form the desired display on the subscriber's television. Graphics on video or picture-on-picture are examples of such a display.

1 Although a single digital compression standard (e.g., MPEG) may be used for both the  
2 program delivery system 200 and the concatenated cable system 210, the compression technique  
3 used may differ between the two systems. When the compression standards differ between the  
4 two media, the signals received by the cable headend 208 must be decompressed before  
5 transmission from the headend 208 to the set top terminals 220. Subsequently, the cable headend  
6 208 must recompress and transmit the signals to the set top terminal 220, which would then  
7 decompress the signals using a specific decompression algorithm.

8 The video signals and program control signals received by the set top terminal 220  
9 correspond to specific television programs and menu selections that each subscriber may access  
10 through a subscriber interface. The subscriber interface is a device with buttons located on the  
11 set top terminal 220 or on a portable remote control 900. In the preferred system embodiment,  
12 the subscriber interface is a combined alpha-character, numeric and iconic remote control device  
13 900, which provides direct or menu-driven program access. The preferred subscriber interface  
14 also contains cursor movement and go buttons as well as alpha, numeric and iconic buttons. This  
15 subscriber interface and menu arrangement enables the subscriber to sequence through menus  
16 by choosing from among several menu options that are displayed on the television screen. In  
17 addition, a user may bypass several menu screens and immediately choose a program by selecting  
18 the appropriate alpha-character, numeric or iconic combinations on the subscriber interface. In  
19 the preferred embodiment, the set top terminal 220 generates the menus that are displayed on the  
20 television by creating arrays of particular menu templates, and the set top terminal 220 displays  
21 a specific menu or submenu option for each available video signal.

22 Figure 2 shows an embodiment where the cable headend 208 and the subscriber's home  
23 are linked by certain communications media 216. In this particular embodiment, analog signals,  
24 digitally compressed signals, other digital signals and up-stream/interactivity signals are sent and  
25 received over the media 216. The cable headend 208 provides such signalling capabilities in its  
26 dual roles as a signal processor 209 and network controller 214.

### 1           3. Set Top Terminal

2           The set top terminal 220 is the portion of the delivery system 200 that resides in the home  
3 of a subscriber. The set top terminal 220 is usually located above or below the subscriber's  
4 television, but it may be placed anywhere in or near the subscriber's home as long as it is within  
5 the range of the subscriber's remote control device 900. In some aspects, the set top terminal 220  
6 may resemble converter boxes already used by many cable systems. For instance, each set top  
7 terminal 220 may include a variety of error detection, decryption, and coding techniques such as  
8 anti-taping encoding. However, it will become apparent from the discussion below that the set  
9 top terminal 220 is able to perform many functions that an ordinary converter box cannot  
10 perform.

11          The set top terminal 220 has a plurality of input and output ports to enable it to  
12 communicate with other local and remote devices. The set top terminal 220 has an input port that  
13 receives information from the cable headend 208. In addition, the unit has at least two output  
14 ports which provide communications from the set top terminal 220 to a television and a VCR.  
15 Certain menu selections may cause the set top terminal 220 to send control signals directly to the  
16 VCR to automatically program or operate the VCR. Also, the set top terminal 220 contains a  
17 phone jack which can be used for maintenance, trouble shooting, reprogramming and additional  
18 customer features. The set top terminal 220 may also contain stereo/audio output terminals and  
19 a satellite dish input port.

20          Functionally, the set top terminal 220 is the last component in the delivery system chain.  
21 The set top terminal 220 receives compressed program and control signals from the cable  
22 headend 208 (or, in some cases, directly from the operations center 202). After the set top  
23 terminal 220 receives the individually compressed program and control signals, the signals are  
24 demultiplexed, decompressed, converted to analog signals (if necessary) and either placed in  
25 local storage (from which the menu template may be created), executed immediately, or sent  
26 directly to the television screen.

27          After processing certain signals received from the cable headend 208, the set top terminal  
28 220 is able to store menu templates for creating menus that are displayed on a subscriber's  
29 television by using an array of menu templates. Before a menu can be constructed, menu

1 templates must be created and sent to the set top terminal 220 for storage. A microprocessor uses  
2 the control signals received from the operations center 202 or cable headend 208 to generate the  
3 menu templates for storage. Each menu template may be stored in volatile memory in the set top  
4 terminal 220. When the set top terminal receives template information it demultiplexes the  
5 program control signals received from the cable headend 208 into four primary parts: video,  
6 graphics, program logic and text. Each menu template represents a different portion of a whole  
7 menu, such as a menu background, television logo, cursor highlight overlay, or other  
8 miscellaneous components needed to build a menu. The menu templates may be deleted or  
9 altered using control signals received from the operations center 202 or cable headend 208.

10 Once the menu templates have been stored in memory, the set top terminal 220 can  
11 generate the appropriate menus. In the preferred embodiment, the basic menu format information  
12 is stored in memory located within the set top terminal 220 so that the microprocessor may  
13 locally access the information from the set top terminal instead of from an incoming signal. The  
14 microprocessor next generates the appropriate menus from the menu templates and the other  
15 menu information stored in memory. The set top terminal 220 then displays specific menus on  
16 the subscriber's television screen that correspond to the inputs the subscriber selects.

17 If the subscriber selects a specific program from a menu, the set top terminal 220  
18 determines on which channel the program is being shown, demultiplexes and extracts the single  
19 channel transmitted from the cable headend 208. The set top terminal 220 then decompresses  
20 the channel and, if necessary, converts the program signal to an analog NTSC signal to enable  
21 the subscriber to view the selected program. The set top terminal 220 can be equipped to  
22 decompress more than one program signal, but this would unnecessarily add to the cost of the  
23 unit since a subscriber will generally only view one program at a time. However, two or three  
24 decompressors may be desirable to provide picture-on-picture capability, control signal  
25 decompression, enhanced channel switching or like features.

26 In addition to menu information, the set top terminal 220 may also store text transmitted  
27 from the cable headend 208 or the operations center 202. The text may inform the subscriber  
28 about upcoming events, billing and account status, new subscriptions, or other relevant

1 information. The text will be stored in an appropriate memory location depending on the  
2 frequency and the duration of the use of the textual message.

3 Also, optional upgrades are available to enhance the performance of a subscriber's set top  
4 terminal 220. These upgrades may consist of a cartridge or computer card (not shown) that is  
5 inserted into an expansion slot in the set top terminal 220 or may consist of a feature offered by  
6 the cable headend 208 or operations center 202 to which the user may subscribe. Available  
7 upgrades may include on line data base services, interactive multi-media services, access to  
8 digital radio channels, and other services.

9 In the simplest embodiment, available converter boxes such as those manufactured by  
10 General Instruments or Scientific Atlanta, may be modified and upgraded to perform the  
11 functions of a set top terminal 220. The preferred upgrade is a circuit card with a microprocessor  
12 which is electronically connected to or inserted into the converter box.

#### 14 4. Remote Control Device

15 The primary conduit for communication between the subscriber and the set top terminal  
16 220 is through the subscriber interface, preferably a remote control device 900. Through this  
17 interface, the subscriber may select desired programming through the system's menu-driven  
18 scheme or by directly accessing a specific channel by entering the actual channel number. Using  
19 the interface, the subscriber can navigate through a series of informative program selection  
20 menus. By using menu-driven, iconic or alpha-character access, the subscriber can access desired  
21 programs by simply pressing a single button rather than recalling from memory and pressing the  
22 actual channel number to make a selection. The subscriber can access regular broadcast and basic  
23 cable television stations by using either the numeric keys on the remote control 900 (pressing the  
24 corresponding channel number), or one of the menu icon selection options.

25 In addition to enabling the subscriber to easily interact with the cable system 200, the  
26 physical characteristics of the subscriber interface 900 should also add to the user friendliness  
27 of the system. The remote control 900 should easily fit in the palm of the user's hand. The  
28 buttons of the preferred remote control 900 contain pictorial symbols that are easily identifiable

1 by the subscriber. Also, buttons that perform similar functions may be color coordinated and  
2 consist of distinguishing textures to increase the user friendliness of the system.

### 3 4 5. Menu-Driven Program Selection

5 The menu-driven scheme provides the subscriber with one-step access to all major menus,  
6 ranging from hit movies to sport specials to specialty programs. From any of the major menus,  
7 the subscriber can in turn access submenus and minor menus by cursor or alpha-character access.

8 There are two different types of menus utilized by the preferred embodiment, the Program  
9 Selection menus and the During Program menus. The first series of menus, Program Selection  
10 menus, consists of an Introductory, a Home, Major menus, and Submenus. The second series of  
11 menus, During Program menus, consists of two primary types, Hidden menus and the Program  
12 Overlay menus.

13 Immediately after the subscriber turns on the set top terminal 220, the Introductory menu  
14 welcomes the subscriber to the system. The Introductory menu may display important  
15 announcements from the local cable franchise, advertisements from the cable provider, or other  
16 types of messages. In addition, the Introductory menu can inform the subscriber if the cable  
17 headend 208 has sent a personal message to the subscriber's particular set top terminal 220.

18 After the Introductory menu has been displayed the subscriber may advance to the next  
19 level of menus, namely the Home menu. In the preferred embodiment, after a certain period of  
20 time, the cable system will advance the subscriber by default to the Home menu. From the Home  
21 menu, the subscriber is able to access all of the programming options. The subscriber may either  
22 select a program directly by entering the appropriate channel number from the remote control  
23 900, or the subscriber may sequence through incremental levels of menu options starting from  
24 the Home menu. The Home menu lists categories that correspond to the first level of menus  
25 called Major menus.

26 If the subscriber chooses to sequence through subsequent menus, the subscriber will be  
27 forwarded to the Major menu that corresponds to the chosen category from the Home menu. The  
28 Major menus further refine a subscriber's search and help guide the subscriber to the selection  
29 of his choice.

1 From the Major menus, the subscriber may access several submenus. From each  
2 submenu, the subscriber may access other submenus until the subscriber finds a desired television  
3 program. Similar to the Major menu, each successive level of Submenus further refines the  
4 subscriber's search. The system also enables the subscriber to skip certain menus or submenus  
5 and directly access a specific menu or television program by entering the appropriate commands  
6 on the remote control 900.

7 The During program menus (including Hidden Menus and Program Overlay Menus) are  
8 displayed by the set top terminal 220 only after the subscriber has selected a television program.  
9 In order to avoid disturbing the subscriber, the set top terminal 220 does not display the Hidden  
10 Menus until the subscriber selects the appropriate option to display a Hidden Menu. The Hidden  
11 Menus contain options that are relevant to the program selected by the viewer. For example, a  
12 Hidden Menu may contain options that enable a subscriber to enter an interactive mode or escape  
13 from the selected program.

14 Program Overlay Menus are similar to Hidden Menus because they occur during a  
15 program and are related to the program being viewed. However, the Program Overlay Menus  
16 are displayed concurrently with the program selected by the subscriber. Most Program Overlay  
17 Menus are small enough on the screen to allow the subscriber to continue viewing the selected  
18 program comfortably.

#### 19 20 B. Detailed Set Top Terminal Description

21 The set top terminal 220 receives and manipulates signals from the cable headend 208.  
22 The set top terminal 220 is equipped with local computer memory and the capability of  
23 interpreting the digitally compressed signal to produce menus for the subscriber. The remote  
24 control 900 communicates the subscriber's selections to the set top terminal 220. The  
25 subscriber's selections are generally based upon menus or other prompts displayed on the  
26 television screen.

27 It is preferred that the signal reaches the subscriber's home in a compressed format and  
28 is decompressed prior to viewing. Included in the delivered program signal is information that  
29 enables equipment at the subscriber's home to display menus for choosing particular programs.



1 Depending on the particular embodiment, the television program signal may arrive at the  
2 subscriber's home through one or more connections such as coaxial cables, fiber cables, twisted  
3 pairs, cellular telephone connections, or personal communications network (PCN) hookups.

4 The program control information signal is generated by the operations center 202 and  
5 provides the network controller 214 with data on the scheduling and description of programs.  
6 In an alternate configuration, this data is sent directly to the set top terminal 220 for display to  
7 the subscriber. In the preferred embodiment, the program control information signal is stored and  
8 modified by the network controller 214 and sent to the set top terminal 220 in the form of a set  
9 top terminal control information stream (STTCIS). The set top terminal 220 integrates either the  
10 program control information signal or the STTCIS with data stored in the memory of the set top  
11 terminal 220 to generate on-screen menus that assist the subscriber in choosing programs for  
12 display.

13 The types of information that can be sent using the program control signal include:  
14 number of program categories, names of program categories, what channels are assigned to a  
15 specific category (such as specialty channels), names of channels, names of programs on each  
16 channel, program start times, length of programs, description of programs, menu assignment for  
17 each program, pricing, whether there is a sample video clip for advertisement for the program,  
18 and any other program, menu or product information.

19 With a minimal amount of information being communicated to the set top terminal 220  
20 on a regular basis, the set top terminal 220 is able to determine the proper menu location for each  
21 program and the proper time and channel to activate for the subscriber after a menu selection.  
22 The program control information signal and STTCIS can be formatted in a variety of ways and  
23 the on-screen menus can be produced using many different methods. For instance, if the program  
24 control information signal carries no menu format information, the menu format for creating the  
25 menus can be fixed in ROM at the set top terminal 220. In the preferred embodiment, the menu  
26 format information is stored at the set top terminal 220 in a temporary memory device such as  
27 a RAM or EPROM. New menu format information is sent via the program control information  
28 signal or the STTCIS to the set top terminals 200 whenever a change to a menu format is desired.

1 In the simplest embodiment, the menu formats remain fixed and only the text changes.  
2 In this way the program control information signal can be limited to primarily text and a text  
3 generator can be employed in the set top terminal 220. Another simple embodiment uses a  
4 separate channel full-time (large bandwidth) just for the menu information.

5 Live video signals may be used in windows of certain menus. These video signals can  
6 be transmitted using the program control information signal or STTCIS, or can be taken off  
7 channels being transmitted simultaneously with the menu display. Video for menus, promos or  
8 demos may be sent to the set top terminal 220 in several formats, including (1) on a dedicated  
9 channel, (2) on a regular program channel and scaled to size, or (3) along with the program  
10 control information signal. However, in the preferred embodiment, a large number of short  
11 promos or demo video is sent using a split screen technique on a dedicated channel. A multiple  
12 window technique may be used with the menus to display a description of a program and one or  
13 more video frames that assist the subscriber in selecting the program.

14 Figure 3 shows the basic hardware components of the set top terminal 220. The set top  
15 terminal 220 has a tuner 603, digital demodulator 606, decryptor 600, and demultiplexers 609,  
16 616 as well as audio equipment 612 and a remote control interface 626 for receiving and  
17 processing signals from the remote control unit 900. An optional modem 627 allows  
18 communication between a microprocessor 602 and the cable headend 208. An NTSC encoder  
19 625 provides a standard NTSC video output.

20 The microprocessor 602 is capable of executing program instructions stored in memory.  
21 These instructions allow a user to access various menus by making selections on the remote  
22 control 900.

23 The manner in which the video is decompressed and the menus are generated from the  
24 program control information signal or STTCIS varies depending on the specific embodiment of  
25 the invention. Video decompressors 618 and 622 may be used if the video is compressed. The  
26 program control information signal may be demultiplexed into its component parts, and a video  
27 decompressor 618, graphic decompressor, text generator and video combiner 624 may be used  
28 to assist in creating the menus.

1 In addition to the menu format information that is stored in graphics memory, the set top  
2 terminal 220 also stores data, tracking those programs that have been selected for viewing. By  
3 gathering this data, the set top terminal 220 can maintain an accurate record of all programs  
4 accessed/watched by storing the data in EEPROM or RAM. Subsequently, this data can be  
5 transmitted to the cable headend 208, where it can be used in carrying out network control and  
6 monitoring functions. Such data transmissions between the set top terminal 220 and cable  
7 headend 208 can be accomplished, for example, through upstream transmission over the cable  
8 network or over telephone lines through the use of telephone modems. Where upstream  
9 transmission over the cable network is used, the set top terminals 220 can complete data  
10 transmissions on a scheduled (e.g., using a polling response or status report to respond to polling  
11 requests sent from the cable headend 208) or as-needed (e.g., using a random access technique)  
12 basis.

13 Figure 4 shows the front panel of the set top terminal 220, which includes an infrared  
14 sensor 630 and a series of LED displays 640. The LED displays 640 may indicate with an icon  
15 or a letter (e.g. A-K) the major menu currently selected by the set top terminal 220 or the  
16 channels selected directly by a user, or menu channel selections (e.g., from 1 to 50). Further  
17 displays may include current channel, time, volume level, sleep time, parental lock (security),  
18 account balance, use of a hardware upgrade, second channel being recorded by VCR, use of the  
19 Level D music hardware upgrade in a separate room, and any other displays useful to a subscriber  
20 to indicate the current status of the set top terminal 220. The LEDs 640 may also provide an  
21 indication of the digital audio channel currently tuned.

22 The set top terminal 220 includes a flapped opening 635 on its front that allows the  
23 insertion of a magnetic cartridge (or similar portable storage device, including optical disk, ROM,  
24 EPROM, etc. not shown). This cartridge opening 635 allows the set top terminal 220 to be  
25 upgraded or reprogrammed locally with the use of a magnetic tape cartridge.

26 On the top or cover of the set top terminal 220 are located pushbutton controls 645. Any  
27 function that can be performed on the remote 900 may also be performed at the set top terminal  
28 220 using the duplicative pushbutton controls 645.

1           Figure 5 shows the back of the set top terminal 220, which includes a pair of output  
2 terminals 650, pair of input terminals 652, pair of stereo/audio output terminals 654, satellite dish  
3 input port 656, telephone jack 658 and an RS-422 port 660. In addition, an upgrade port 662 and  
4 a cover plate 664 are held in place by a series of sheet metal screws. One of the output terminals  
5 650 is for a television and the other is for a VCR. The set top terminal 220 is equipped to handle  
6 incoming signals on one or two cables using the input terminals 652. The phone jack 658 and  
7 an RS-232 or RS-422 port 660 are provided for maintenance, trouble shooting, reprogramming  
8 and additional customer features. In alternate embodiments, the telephone jack 658 may be used  
9 as the primary mode of communication between the cable headend 208 and the set top terminal  
10 220. This connection is possible through the local telephone, cellular telephone or a personal  
11 communications network (PCN).

12           The basic programming of each set top terminal 220 is located on ROM within the set top  
13 terminal 220. Random access memory, the magnetic cartridge capability, and the expansion card  
14 slot 635 each allow upgrades and changes to be easily made to the set top terminal 220.

15           In the preferred embodiment, the set top terminal 220 includes a hardware upgrade port  
16 662, in addition to expansion card slots. The hardware upgrade port 662 accommodates a four-  
17 wire (or more) connection for: (1) error corrected, decrypted data output of the set top terminal  
18 220, (2) a control interface, (3) decompressed video output, and (4) a video input port. In the  
19 preferred embodiment, multiple wires are used to perform each of the four functions. The four  
20 sets of wires are combined in a single cable with a single multipin connector.

21           In the preferred embodiment, multipin connections may be used for the multiwire cable.  
22 The multipin connection 662 may range from DB9 to DB25. A variety of small computer  
23 systems interface (SCSI) ports may also be provided. Alternatively, four or more ports may be  
24 provided instead of the single port depicted.

25           Another port 662 is used to attach the various hardware upgrades described below to a  
26 set top terminal 220. The preferred embodiment has a number of hardware upgrades available  
27 for use with a set top terminal 220, including: (1) a Level A interactive unit, (2) a Level B  
28 interactive unit, (3) a Level C interactive unit with compact disc capability, (4) a Level D digital  
29 radio tuner for separate room use, and (5) a Level E information download unit. Each of these

1 upgrades may be connected to the set top terminal 220 unit through the upgrade port 662  
2 described earlier. The same four wires in a single cable described earlier may be used.

3 Existing set top converter boxes such as those made by Scientific Atlanta or General  
4 Instruments are presently unequipped to handle the menu selection system of the present  
5 invention. Thus, hardware modifications are necessary in order to use the menu selection system  
6 with existing set top converter technology.

7 A Turbo Card addition to a set top converter is depicted in Figure 6. The Turbo Card 700  
8 shown provides the additional functionality needed to utilize the menu system with existing set  
9 top converter technology. The primary functions the Turbo Card 700 adds to the set top  
10 converter are the interpreting of program control information signals, generating of menus,  
11 sequencing of menus, and, ultimately, the ability of the viewer to select a channel through the  
12 menu system without entering any channel identifying information. The turbo card also provides  
13 a method for a remote location, such as the cable headend 208, to receive information on  
14 programs watched and control the operation of the set top converter and Turbo Card 700. The  
15 programs watched information and control commands may be passed from the cable headend 208  
16 to the Turbo Card 700 using telephone lines.

17 The primary components of the Turbo Card 700 are a PC chip CPU 702, a VGA graphic  
18 controller 704, a video combiner 706, logic circuitry 708, NTSC encoder 710, a receiver 712,  
19 demodulator 714, and a dialer 716. The Turbo Card 700 operates by receiving the program  
20 control information signal from the cable headend 208 through the coaxial cable. The logic  
21 circuitry 708 of the Turbo Card 700 receives data, infrared commands, and synchronization  
22 signals from the set top converter. Menu selections made by the viewer on the remote control  
23 900 are received by the set top converter's IR equipment and passed through to the Turbo Card  
24 700. The Turbo Card 700 interprets the IR signal and determines the program (or menu) the  
25 viewer has selected. The Turbo Card 700 modifies the IR command to send the program  
26 selection information to the set top converter 221. The modified IR command contains the  
27 channel information needed by the set top converter. Using the phone line and dialer 716, the  
28 Turbo Card 700 is able to transmit program access information to the cable headend 208.

1 In the preferred embodiment, program access information, that is what programs the  
2 viewer watched, is stored at each set top terminal 220 until it is polled by the network controller  
3 214 using a polling request message format as shown in Figure 7a. This frame format 920  
4 consists of six fields, namely: (1) a leading flag 922 at the beginning of the message, (2) an  
5 address field 924, (3) a subscriber region designation 926, (4) a set top terminal identifier 928  
6 that includes a polling command/response (or P/F) bit 930, (5) an information field 932, and (6)  
7 a trailing flag 934 at the end of the message. Figure 7b shows a response frame format 920'  
8 (similar to the frame format 920 end, therefore, commonly numbered with the frame depicted in  
9 Figure 7a, but with the prime indicator added for clarity) for information communicated by the  
10 set top terminal 220 to the network controller 214 in response to the polling request of Figure 7a.

11 The eight-bit flag sequence 922 that appears at the beginning and end of a frame is used  
12 to establish and maintain synchronization. Such a sequence typically consists of a "01111110"  
13 bit-stream. The address field 924 designates a 4-bit address for a given set top terminal 220. The  
14 subscriber region designation 926 is a 4-bit field that indicates the geographical region in which  
15 the subscriber's set top terminal 220 is housed. The set top terminal identifier 928 is a 16-bit  
16 field that uniquely identifies each set top terminal 220 with a 15-bit designation followed by an  
17 appended P/F bit 930. Although field size is provided by this example, a variety of sizes can be  
18 used with the present invention.

19 The P/F bit 930 is used to command a polling response from the set top terminal 220  
20 addressed, as described below. The response frame format 920' also provides a variable-length  
21 information field 932' for other data transmissions, such as information on system updates. The  
22 frame format 920' ends with an 8-bit flag (or trailing flag) 934' that is identical in format to the  
23 leading flag 922', as set forth above. Other frame formats (e.g., MPEG) will be apparent to one  
24 skilled in the art and can be easily adapted for use with the system.

25 As summarized above, images or programs may be selected for display by sequencing  
26 through a series of menus. Figure 8 is an example of one possible structure for a series of menus.  
27 Generally, the sequence of menus is structured with an introductory menu, a home menu, various  
28 major menus and a multitude of submenus. The submenus can include promo menus and during  
29 program menus. For example, at the home menu portion of the sequence of menus and

1 corresponding software routines, a subscriber may select one of the major menus and start a  
2 sequence of menu displays. Alternatively, a subscriber may go directly to a major menu by  
3 depressing a menu select button on remote control 900.

4 At any time during the menu sequence, the subscriber may depress a major menu button  
5 to move into another series of menus. In this way, a subscriber may move from major menu to  
6 major menu.

7 The various software subroutines executed by the microprocessor 602 allow a subscriber  
8 to sequence the menus, navigating through the various menus of the present invention. A  
9 subscriber may sequence back through menus or return to the home menu with a single touch of  
10 the home menu button on remote 900.

11 An introductory menu screen 1000 automatically appears upon power-up and  
12 initialization of the set top terminal 220. From this introductory menu screen 1000, the set top  
13 terminal software will normally advance the subscriber to the home menu screen 1010. The  
14 home menu 1010 is the basic menu that the subscriber will return to in order to make the first  
15 level of viewing decisions. When the set top terminal software is displaying the home menu  
16 1010, the subscriber is able to access any television programming option. The software allows  
17 programming options to be entered through cursor movement on the screen and directly by button  
18 selection on the remote control 900.

19 In the normal progression through the menu screens, the software will forward the  
20 subscriber to a major menu screen 1020 in response to the subscriber's remote control 900  
21 selection or highlighted cursor selection from the home menu screen 1010. The selections  
22 displayed on the home menu 1010 are for large categories of programming options.

23 Following the major menu 1020, the subscriber may navigate through one or more  
24 submenu screens 1050 from which the subscriber may choose one particular program for  
25 viewing. For most programming selections, the user will proceed from the home menu 1010 to  
26 a major menu 1020 and then to one or more submenus 1050. However, for certain programming  
27 options or functions of the set top terminal 220, the user may skip one or more menus in the  
28 sequence.

1           The During Program Menus 1200 are submenus enabled by the set top terminal software  
2           only after the subscriber has selected a television program. These menus provide the subscriber  
3           with additional functionality and/or additional information while viewing a selected program.  
4           The During Program Menus 1200 sequence can be further subdivided into at least two types of  
5           menus, Hidden Menus 1380 and Program Overlay Menus 1390.

6           To avoid disturbing a subscriber during viewing of a program, the Hidden Menus 1380  
7           are not shown to the subscriber but instead "reside" at the set top terminal 220 microprocessor  
8           602. The microprocessor 602 awaits a button entry either from the remote control 900 or set top  
9           terminal 220 buttons before executing or displaying any Hidden Menu 1380 options. The set top  
10          terminal software provides the subscriber with additional functions such as entering an  
11          interactive mode or escaping from a selected program through use of Hidden Menus 1380.

12          Program Overlay Menus 1390 are similar to Hidden Menus 1380. However, the Program  
13          Overlay Menus 1390 are overlaid onto portions of the displayed video and not hidden. The  
14          software for the Program Overlay Menus 1390 allows the subscriber to continue to watch the  
15          selected television program with audio but places graphical information on a portion of the  
16          television screen. Most Program Overlay Menus 1390 are graphically generated to cover small  
17          portions of video. Some Overlays 1390 which are by their nature more important than the  
18          program being viewed will overlay onto greater portions of the video. Examples of types of  
19          overlay menus 1390 include Notification Menus 1392 and Confirmation Menus 1394. In the  
20          preferred embodiment, the software for the Program Overlay Menus 1390 controls the reduction  
21          or scales down the (entire) programs video and redirects the video to a portion of the screen.

22          Submenus provide the cost of viewing the program and the program's length in hours and  
23          minutes. From the submenus, the subscriber is given at least three options: (1) to purchase a  
24          program, (2) to return to the previous menu, and (3) to press "go" and return to regular TV. The  
25          subscriber may also be given other options such as previewing the program.

26          Using an on-screen menu approach to program selection, there is nearly an unlimited  
27          number of menus that can be shown to the subscriber. The memory capability of the set top  
28          terminal 220 and the quantity of information that is sent using the program control information  
29          signal are the only limits on the number of menus and amount of information that can be



1 displayed to the subscriber. The approach of using a series of menus in a simple tree sequence  
2 is both easy for the subscriber to use and simply implemented by the set top terminal 220 and  
3 remote control device 900 with cursor movement. A user interface software programmer will  
4 find many obvious variations from the preferred embodiment described.

5 The set top terminal 220 generates and creates menus using, in part, information stored  
6 in its graphics memory. A background graphics file 800 will store menu backgrounds and a logo  
7 graphics file will store any necessary logos. A menu display and cursor graphics file will store  
8 menu display blocks and cursor highlight overlays as well as any other miscellaneous files  
9 needed to build the menus. Using this method of storing menus, the menus can be changed by  
10 reprogramming the graphics memory of the set top terminal 220 through instructions from either  
11 the network controller 214 or operations center 202.

12 The microprocessor 602 performs the steps required to create a menu using stored  
13 information. The microprocessor 602 fetches a background file, logo file, menu display and  
14 cursor file in most instances. The microprocessor 602 fetches text from long-term, intermediate-  
15 term, or short-term storage depending on where the text is stored. Using a video combiner (or  
16 like device), the stored information is combined with video and the entire image is sent to the  
17 television screen for display.

18 In the preferred embodiment, a graphics controller is used to assist the set top terminal  
19 220 in generating menus. Menu generation by the set top terminal 220 begins with the building  
20 of a major menu screen, which includes background graphics for that major menu. The  
21 background graphics may include an upper sash across the top of the screen and a lower sash  
22 across the bottom of the screen. The background graphics may be generated from the  
23 background graphics file 800 in the memory files of the graphics memory (preferably EEPROM).  
24 In addition, logo graphics may be generated. Such graphics typically include an icon window,  
25 a cable company logo, a channel company logo, and two "go" buttons.

26 Preferably, the text for each major menu is generated separately by a text generator in the  
27 set top terminal 220. Those portions of the text that generally remain the same for a period of  
28 weeks or months may be stored in EEPROM or other local storage. Text which changes on a  
29 regular basis, such as the movie titles (or other program selections), is transmitted to the set top

1 terminal 220 by either the operations center 202 or the network controller 214 of the cable  
2 headend 208. In this manner, the cable headend 208 may change the program selections  
3 available on any major menu 1020 by modifying the program control information signal sent by  
4 the operations center 202 and transmitting any changes using the STTCIS.

5 Day, date and time information are added to each major menu. This information is sent  
6 from the operations center 202, the cable headend 208 (signal processor 209 or network  
7 controller 214), the uplink site, or generated by the set top terminal 220 internally.

8 The creation and display of program description submenus is performed by the set top  
9 terminal 220 in a manner similar to that described above. Each submenu may be created in parts  
10 and combined before being sent to the television screen. Preferably, background graphics and  
11 upper and lower sashes are used. Likewise, a video window and half-strip window can be  
12 generated from information in storage on the EEPROM.

13 In addition to graphics and text, some submenus include windows that show video. Such  
14 video may be still or moving pictures. Still pictures may be stored in a compressed format (such  
15 as JPEG) at the set top terminal 220. Video stills may be transmitted by the operations center  
16 202 through the program control information signal from time to time.

17 Moving video picture is obtained directly from a current video feed as described above.  
18 Depending on video window size, this may require manipulation of the video signal, including  
19 scaling down the size of the video and redirecting the video to the portion of the menu screen  
20 which is within the video window of the menu. Alternatively, the video may be obtained from  
21 a split screen channel. Such a method involves the use of split screen video techniques to send  
22 multiple video clips on a single channel at a given time. The set top terminal 220 would scale  
23 the picture, if necessary, and redirect it to the correct position on the screen using known scaling  
24 and positioning techniques. Additional circuitry may be required in the set top terminal 220 to  
25 perform adequate scaling and repositioning.

26 To avoid the need for redirecting video into the portion of the screen which houses the  
27 video window, masking and menu graphics may be used to cover the portions of the channel  
28 video that are not needed. This masking technique allows the split screen video to remain in the  
29 same portion of the screen that it is transmitted by the operations center 202. The masking is

1 then adjusted to cover the undesired portions of the screen. These masks are stored in the  
2 background graphics file similarly to other background files for menus.

3 The split screen video technique may also be used for promoting television programming.  
4 Since a great number of short video clips may be sent continuously, full or partial screen  
5 promotionals (or informationals) may be provided to the subscriber. With this large quantity of  
6 promotional video, the subscriber is given the opportunity to "graze" through new movie or  
7 television programming selections. The subscriber simply grazes from promotional video to  
8 promotional video until the desired television program is discovered.

### 10 C. Detailed Description of Advanced Set Top Terminal

#### 11 1. Overview

12 The present invention involves a set top converter box or terminal 220 for a television  
13 program delivery system 200. More specifically, an advanced set top converter box 220 acts as  
14 a terminal in the viewer home. The set top terminal 220 is a key component of a digital cable  
15 television delivery system 200. The set top terminal 220 is an upgradeable system that provides  
16 for the decompression of digital program signals. The preferred set top terminal 220 provides  
17 both a menu generation capability as well as a number of advanced features and functional  
18 capabilities.

19 The set top terminal 220 of the present invention may be achieved through a set of  
20 hardware upgrades to any of the following embodiments: (1) an existing set top converter 220  
21 upgraded with a circuit card (which has a microprocessor electronically connected to the set top  
22 converter 220), such as a Turbo card 700 or the like; (2) an industry standard decompression  
23 converter 220 ungradable by either an upgrade module or a menu generation card; and (3) a set  
24 top converter box 220 capable of both decompression and menu generation. The hardware  
25 upgrades provide additional advanced features and functional capabilities to any of these  
26 embodiments.

27 A number of advanced features and functional capabilities are supported by the preferred  
28 set top terminal 220. This set top terminal 220 provides subscribers with a picture-on-picture  
29 capability without requiring a special television to support the capability. The set top terminal

1 220 also supports a TV guide service, which provides subscribers with information on all  
2 programming available at its particular subscriber location. The set top terminal 220 further  
3 includes the capability of querying viewers to establish, among other things, favorite channel  
4 lists, personal profile data and mood information. The set top terminal 220 allows the subscriber  
5 to view promotional menus on future programming events.

6 The set top terminal 220 supports additional capabilities using its hardware upgrades that  
7 allow subscribers to use other interactive services, for example, to engage in on-line question and  
8 answer sessions, to order and confirm airline tickets, and to access a variety of other data  
9 services. The set top terminal 220 makes use of a digital tuner as a hardware upgrade to provide  
10 subscribers with a digital audio capability.

11 The preferred set top terminal 220 may be used to control video tape machines, thereby  
12 simplifying the recording of programs. The set top terminal 220 can, in conjunction with the  
13 program delivery system 200, easily support high definition television (HDTV). For subscribers  
14 living in remote locations, the set top terminal 220 accommodates backyard satellite systems.  
15 In addition to all the features that the set top terminal 220 supports with its current internal  
16 programming and upgradeability, additional features may be added or existing features increased  
17 through remote reprogramming of the set top terminal 220.

18  
19 Table A shows several exemplary hardware configurations that may be used to achieve  
20 the goals of the present invention. In particular, Table A shows four columns of set top converter  
21 technology, which may be modified to produce the various set top capabilities shown in the three  
22 rows of the table.

**TABLE A**

	Existing Analog Set Top Converter	Set Top Converter With Digital Decompression	Set Top Converter With Digital Decompression & Menu Generation Capabilities	Advanced Set Top Terminal
<b>Decompression Capability</b>	N/A	Built-In	Built-In	Built-In
<b>Menu Generation Capability</b>	Turbo Card	Upgrade Module or Menu Generation Card	Built-In	Built-In
<b>Advanced Features</b>	Level A-C Hardware Upgrades or Expansion Card	Level A-E Hardware Upgrades or Expansion Card	Level A-E Hardware Upgrades or Expansion Card	Built-In

The table shows the various inherent functional capabilities of each set top converter, and how each may be modified or upgraded, if necessary, to achieve the objectives of the present invention. From left to right, the columns of the table span the various alternatives for balancing those capabilities that may be built into set top converters or terminals, on the one hand, and those capabilities that can be provided through, for example, an upgrade module, expansion card or hardware upgrade of the present invention, on the other. This balance allows a designer or manufacturer of set top converters to choose between adding advanced functionality to an existing converter box or, instead, producing a converter with additional built-in features that increase cost and complexity of the converter or terminal.

The first column of Table A shows how an existing analog set top converter can be modified to provide menu generation capability through the use of the Turbo Card. In addition to the Turbo Card, such an existing analog set top converter may be further modified to provide any of the advanced features described below through the use of the Level A, Level B and Level C hardware upgrades or an expansion card. Such existing set top converter boxes are currently manufactured by Scientific Atlanta and General Instruments, among others. These converter boxes have been designed for use with analog waveforms and, as a result, digital decompression capabilities are not applicable.

1           The second column of Table A shows a set top converter with digital decompression  
2 capability. This converter is a simple decompression box which may eventually become the  
3 industry standard. The simple decompression boxes may be modified to provide the enhanced  
4 functionality of the present invention. For example, a simple decompression box may be  
5 modified to produce menu generation capability through the use of an upgrade module or menu  
6 generation card. In addition, other advanced features may be added to a simple decompression  
7 box through modifications that include any of the Level A through E hardware upgrades or an  
8 expansion card. Each of these modifications are described below.

9           The third column of Table A shows a set top converter that has built-in digital  
10 decompression and menu generation capabilities. Thus, in order to achieve the enhanced  
11 functionality of the present invention, other advanced features may be provided through hardware  
12 modification. Such modification may be accomplished through the use of any of the Level A  
13 through E hardware upgrades or the expansion card, as explained below.

14           The fourth column of Table A shows an advanced set top terminal having decompression,  
15 menu generation, and advanced functional capabilities. Each of these capabilities are built in to  
16 the terminal itself. In this way, achieving the enhanced performance of the set top terminal in  
17 accordance with the present invention would require no hardware modification.

18           In the preferred embodiment, the advanced set top terminal 220 of the present invention  
19 has the capability, among other things, of receiving tiered programming from the network  
20 controller. Tiered programming allows different users to view different video even though the  
21 subscribers are "tuned" to the same channel. For example, the network controller 214 may know  
22 the demographics of its subscribers through a database, by "learning" from prior subscriber  
23 choices, from an interactive selection, or from other means. Using the demographics  
24 information, the network controller 214 may target commercials to the correct audience by  
25 showing different commercials to subscribers with different demographics. Even though  
26 subscribers will believe they are "tuned" to one channel, each subscriber will be switched to a  
27 different channel for the tiered video. Alternatively, subscribers may be offered an option of  
28 several commercials from which to choose.

1 To accommodate foreign speaking subscribers, multiple audio channels for television  
2 programming may be provided. In this way, the subscriber may be shown menus of programs  
3 available in the subscriber's native language. The function of choosing the correct audio to  
4 correspond to the selected language may be handled by either the set top terminal 220 or the  
5 network controller 214 depending upon the configuration. Local programming in several  
6 languages or additional audio channels for a foreign language translation of a popular television  
7 program may be provided by the network controller 214. Using a picture-on-picture feature, sign  
8 language may be similarly made available to certain set top terminals 220 for the deaf. Also, a  
9 text overlay may easily be produced on the lower part of the screen for the deaf.

10 Typically, each video signal is received at the set top terminal 220 along with four audio  
11 channels. Two of these audio channels will preferably be used for left and right stereo audio  
12 reception of the video signal being displayed. The remaining two audio signals may be used for  
13 alternative languages. For example, where a video signal is received by the set top terminal 220,  
14 two of the audio channels will provide the stereo audio signals for that video in English, with the  
15 other two audio channels providing mono audio signals in French and Spanish. In this way, each  
16 video signal received at the set top terminal 220 can accommodate at least two foreign languages.  
17 Where stereo audio channels are not desired, the audio channels in English can be set to a single  
18 signal, providing mono audio reception, and increasing the multiple language audio channel  
19 capability to three foreign languages.

20 In other embodiments, the network controller 214 can act as a central computer and  
21 provide intra-set top terminal interactive games, inter-set top terminal interactive games,  
22 computer bulletin board type services, message services (Electronic mail) etc. For example, a  
23 subscriber may play war games with five (anonymous) fellow subscribers each in their own home  
24 each operating a separate tank. The network controller 214 gathers the players via set top  
25 terminal 220 communications and acts as the referee. A bulletin board or message system can  
26 be set up to discuss a particular program such as "Twin Peaks Whodunit" for enthusiasts. These  
27 interactive features are further described below with the interactive services level B menu and  
28 the set top terminal hardware upgrade level B interactive unit.

1 In order to achieve the required throughput of video and audio information for the system,  
2 digital compression techniques for video are employed. As a result, the set top terminal 220  
3 typically must decompress any digitally compressed program signals that it receives. Methods  
4 of decompression are a function of the compression technique used in the program delivery  
5 system.

6 There are three basic digital compression techniques: within-frame (intraframe), frame-  
7 to-frame (interframe), and within-carrier compression. Various compression methods may be  
8 used with these techniques. Such methods of compression, which include vector quantization  
9 and discrete cosine transform methodologies, are known to those skilled in the art.

10 Several standard digital formats representing both digitizing standards and compression  
11 standards have also been developed. For example, JPEG (joint photographic experts group) is  
12 a standard for single picture digitization. Motion picture digitization may be represented by  
13 standards such as MPEG or MPEG 2 (motion picture engineering group specification). In  
14 addition to these standards, other proprietary standards have been developed. Although MPEG  
15 and MPEG 2 for motion pictures are preferred in the present invention, any reliable digital format  
16 with compression may be used.

17 Various hybrids of the above compression techniques and methods have been developed  
18 by several companies including AT&T, Compression Labs, Inc., General Instruments, Scientific-  
19 Atlanta, Philips, and Zenith. Any of the compression techniques developed by these companies,  
20 as well as other techniques known to those skilled in the art, may be used with the present  
21 invention.

## 22 23 2. Advanced Set Top Terminal Major Components and Upgrades

### 24 a. Decompression Box with Upgrade Module

25 The preferred program delivery system uses digitally compressed signals and, as a result,  
26 the preferred subscriber equipment configuration must be capable of decompressing and  
27 processing such digitally compressed signals. Figure 9a diagrams the basic interplay between  
28 an upgrade module 300 and a simple decompression box 302. The upgrade module 300 can be  
29 connected to the decompression box 302 through a port similar to the upgrade port 662 described



1 above (Figure 5). The simple decompression box 302 shown is preferably a future industry  
2 standard decompression box capable of communicating with an upgrade module 300 to enhance  
3 functionality.

4 The upgrade module 300 provides menu generation capability to the simple  
5 decompression box 302. The microprocessor of the simple decompression box 302  
6 communicates with the microprocessor in the upgrade module 300 to provide the full  
7 functionality of a set top terminal 220.

8 In the preferred embodiment, multipin connections may be used for a multiwire cable  
9 connecting the simple decompression box 302 with the upgrade module 300. The multipin  
10 connection may range from DB9 to DB25. A SCSI, or small computer systems interface, port  
11 (not shown) may also be provided. Alternatively, four or more ports may be provided instead  
12 of the single port depicted. If a port is not provided, the upgrade module may, alternatively, be  
13 hard-wired to the simple decompression box 302.

14 As represented generally at 304, the digital data set of output wires of the simple  
15 decompression box 302 will preferably output error corrected and decrypted data to the upgrade  
16 module 300. The second set of wires, providing the interface connection, allows the  
17 microprocessor in the upgrade module 300 to communicate with the microprocessor of the  
18 simple decompression box 302. In this manner, the video circuitry of the upgrade module 300  
19 and the simple decompression box 302 may maintain synchronization. The third set of wires,  
20 providing the decompressed video output, provide the upgrade module 300 with a decompressed  
21 video signal to manipulate. The fourth set of wires, comprising the video input set, allows the  
22 simple decompression box 302 to accept a video signal that is a combined text, graphics, and  
23 video signal.

24 Figure 9a further shows the CATV input 306, video input 308, and video and audio  
25 outputs 310, 312, as part of the simple decompression box 302. This embodiment reduces the  
26 component cost of upgrade module 300, and thus, is preferred. The upgrade module 300 may  
27 simply be a cartridge (not shown) insertable into the simple decompression box 302.  
28 Alternatively, as shown in commonly numbered Figure 9b, the CATV input 306, video input 308

1 and video and audio outputs 310, 312 may be included as part of the upgrade module 300. In this  
2 embodiment, the simple decompression box 302 is primarily used for decompressing the video.

3 Referring to Figure 10, the upgrade module 300 preferably includes the following  
4 circuitry: a video graphics and text demultiplexer 314; a text and graphics video plane combiner  
5 316; a run length graphics decompressor 318; and, a run length compressed graphics memory 319  
6 (nonvolatile RAM, ROM, EPROM, or EEPROM). By means of communications through the  
7 multiwire connection between the upgrade module 300 and the simple decompression box 302,  
8 compressed video and control signals may be demultiplexed by the demultiplexer 314 within the  
9 upgrade module 300. The run length graphics decompressor 318, through communications with  
10 the run length compressed graphics RAM 319, permits decompression of the input compressed  
11 video signal. The text and graphics video plane combiner 316 allows demultiplexed and  
12 decompressed signals to be output, through the simple decompression box 302, to a subscriber's  
13 television 222 showing both video and overlay menus with text.

14 Figure 10 shows the elements of a simple decompression box 302 (numbered commonly  
15 with the elements of the set top terminal 220 depicted in Figure 3) with the upgrade module 300  
16 described above. Generated menus and video are combined in the combiner 316 and output to  
17 an antitaping encoder 619. Any method of antitaping encoding known by those skilled in the art  
18 may be used with the present invention.

19 Figure 10 also depicts an expansion card 320 and an expansion card interface 322 for  
20 receiving the card 320. In addition, error correction circuitry 324 is shown receiving the  
21 demodulated signal, prior to demultiplexing the signal.

22 The enhanced functionality of the upgrade module 300 may alternatively be included on  
23 the expansion card 320. In this embodiment, the upgrade module 300 becomes an internal  
24 component of the simple decompression box 302 and internally upgrades the box 302 to include  
25 menu generation capability without using an external hardware upgrade module 300. Other  
26 variations in the upgrade module 300 configuration are also possible.

1                   b. Upstream Data Transmission

2               Figure 11 shows a preferred set top terminal 220 that includes a data receiver 332 and a  
3 data transmitter 344. The data transmitter 344 provides upstream data communications capability  
4 between the set top terminal 220 and the cable headend 208. Upstream data transmissions are  
5 accomplished using the polling system described with reference to Figures 7a and 7b above, and,  
6 in particular, using a data transmitter 344. Both receiver 332 and transmitter 344 may be built  
7 into the set top terminal 220 itself or added through an upgrade module 300. Regardless of the  
8 specific hardware configuration, the set top terminal's data transmission capabilities may be  
9 accomplished using the hardware shown in Figure 11.

10              Figure 11 shows RF signals, depicted at 330, being received at by a data receiver 332 and  
11 tuner 603 working in unison. Both of these devices are interfaced with the microprocessor 602,  
12 which receives inputs, depicted at 338, from the subscriber, either through the set top terminal's  
13 keypad 645 or remote control unit 900. All cable signals intended for reception on the  
14 subscriber's TV are accessed by the tuner 603 and subsequently processed by the processing  
15 circuitry 340. This processing circuitry 340 typically includes additional components for  
16 descrambling, demodulation, volume control and remodulation on a Channel 3 or 4 TV carrier.

17              Data targeted to individual set top terminals 220 is received by the data receiver 332  
18 according to each set top terminal's specific address or ID (e.g. set top ID 928, 928'). In this  
19 way, each addressable set top terminal 220 only receives its own data. The data receiver 332 may  
20 receive set top terminal specific data in the information field of the program control information  
21 signal frame described with reference to Figure 7a or on a separate data carrier located at a  
22 convenient frequency in the incoming spectrum.

23              Any received data includes information regarding channels and programs available for  
24 selection. The subscriber may enter a series of commands using the keypad 645 or remote  
25 control 900 in order to choose a channel or program. Upon receipt of such commands, the set  
26 top terminal's microprocessor 602 instructs the tuner 603 to tune to the proper frequency of the  
27 channel or program desired and subsequently instructs the processing circuitry 340 to begin  
28 descrambling of this channel or program.

1           Upon selection of a channel or program, the microprocessor 602 stores any selection  
 2 information in local memory for later data transmission back to the cable headend 208.  
 3 Typically, the data transmitter 344 operates in the return frequency band between 5 and 30 MHZ.  
 4 In an alternative embodiment, the frequency band of 10 to 15 MHZ may be used. Regardless,  
 5 however, of the frequency band used, the data transmitter 344 sends information to the cable  
 6 headend 208 or network controller 214 in the information field of the frame described with  
 7 reference to Figure 7b. Those skilled in the art will recognize that a number of variations and  
 8 combinations of the above-described set top terminal 220 hardware components may be used to  
 9 accomplish upstream data transmissions.

#### 11           c. Hardware Upgrades

12           In order to enhance a set top terminal's 220 functionality, the following hardware  
 13 upgrades may be used: (1) a Level A interactive unit, (2) a Level B interactive unit, (3) a Level  
 14 C interactive unit with compact disc capability, (4) a Level D digital radio tuner for separate  
 15 room use, and (5) a Level E information download unit. Each of these upgrades is connected to  
 16 the set top terminal 220 unit through the upgrade port 662 described earlier.

17           Level A, B and C hardware upgrades have similar hardware components. Figure 12a  
 18 diagrams the basic components of the Level A, B and C hardware upgrades, indicated generally  
 19 at 100. The figure diagrams the interaction between the hardware upgrades 100 and the set top  
 20 terminal's 220 basic components. As seen in the figure, CATV input signals are received by the  
 21 set top terminal 220 using a tuner 603 and various receiver components described above (but  
 22 denoted generally at 601 in Figures 12a and 12b). The set top terminal's microprocessor  
 23 coordinates all CATV signal reception and also interacts with various upstream data transmission  
 24 components 604, which have been described above.

25           The Level A, B and C hardware upgrades 100 each include a microprocessor 104,  
 26 interactive software 106, processing circuitry 108, bubble memory 112, and a long-term memory  
 27 device 116. In addition to these basic components, the Level B hardware upgrade makes use of  
 28 an additional telephone modem 120, while the Level C hardware upgrade makes use of an  
 29 additional CD-ROM storage device 122.

1 Along with their basic components, the Level A, B and C hardware upgrades 100 each  
2 use their own interactive software 106. This software may be used to provide the enhanced  
3 functional capabilities described below. The Level A, B and C hardware upgrades also make use  
4 of processing circuitry 108, which allows the set top terminal 220 to pass the subscriber's  
5 interactive input to the Level A, B and C hardware upgrades 100 for interpretation. These  
6 commands are passed through the interface linking the set top terminal's microprocessor with  
7 the microprocessor of the Level A, B and C hardware upgrades 100. In this way, subscriber  
8 inputs, entered through the set top terminal keypad or remote control, can be transferred to any  
9 of the hardware upgrades for processing and responses generated therein can then be sent back  
10 to the set top terminal 220 for display. In the preferred embodiment the IR commands are  
11 transferred from set top terminal to hardware upgrade.

12 The Level A, B and C hardware upgrades 100 also include a long-term memory  
13 component or device 116 that allows each hardware upgrade to internally store data used with  
14 each interactive service. Such data may include, for example, customized menu templates used  
15 by the individual interactive services. In addition, the Level A, B and C hardware upgrades  
16 include a bubble memory 112 for the temporary storage of, for example, interactive questions and  
17 responses used in each particular interactive service.

18 The Level A interactive unit allows the subscriber to access interactive services offering  
19 additional information about programs such as quizzes, geographical facts, etc. This information  
20 may be received by the set top terminal 220 in several data formats, including using the vertical  
21 blanking interval (VBI) or the program control information signal. The Level A interactive unit  
22 enables the subscriber to engage in textual interactivity with the current television program using  
23 overlay menus. Some examples are quizzes, fast facts, more info, where in the world, products,  
24 etc, all of which provide the subscriber with an interactive question and answer capability.  
25 Although the Level A interactive capability can easily be built into the set top terminal 220, such  
26 an embodiment increases the cost of the basic set top terminal 220.

27 The Level B interactive unit provides the user with access to online data base services for  
28 applications such as home shopping, airline reservations, news, financial services, classified  
29 advertising, home banking, and interactive teletext services. For example, with this upgrade, a

1 user will be able to reserve plane tickets or buy consumer electronics. The primary feature of this  
 2 upgrade unit is that it allows actual transactions using two-way communications over modem  
 3 with outside services. This added two-way communications capability may be with the cable  
 4 headend 208 or, alternatively, over cellular networks, PCN or other communications media.

5 The Level C interactive unit employs a high volume local storage capacity, including  
 6 compact disc or other random access digital data formats (e.g., CD-ROM 122). This unit allows  
 7 use of interactive multi-media applications. Such applications include, for example, computer  
 8 games, multi-media educational software, encyclopedias, other reference volumes (e.g.  
 9 Shakespeare library), etc. In the preferred embodiment, many of these applications will interact  
 10 with live programming providing additional information and interactivity to the basic program  
 11 feed. For example, a viewer watching a show set in a foreign country may be able to retrieve  
 12 additional information, maps, economic data, as well as other information about that country that  
 13 are stored on the compact disc. In the Level C applications, the upgrade hardware may closely  
 14 monitor the television broadcast through additional data channels (e.g., vertical blanking interval,  
 15 or other digital data encoded within live video) providing context sensitive interactivity.

16 Figure 12b diagrams the interaction between the set top terminal 220 and the Level D  
 17 hardware upgrade, indicated generally at 130. As shown in the figure, the CATV signals are  
 18 input to the set top terminal 220 through its tuner 603 and receiver components 601. As  
 19 described above, the microprocessor 602 coordinates all cable television signal reception by the  
 20 set top terminal 220. The Level D hardware upgrade 130 makes use of a microprocessor 132,  
 21 a tuner 134, a demodulator 136, a demultiplexer 138, a decryptor 140 and an audio decompressor  
 22 142.

23 As shown in the figure, the set top terminal 220 and the Level D hardware upgrade 130  
 24 interact through the interface linking the respective devices. The set top terminal's  
 25 microprocessor 602 instructs received signals to be transferred to the Level D hardware upgrade  
 26 130 for further processing. These received signals are input to the Level D hardware upgrade,  
 27 passed through the signal path comprising the tuner 134 and other digital audio reception  
 28 components (i.e., demodulator 136, demultiplexer 138, decryptor 140 and audio decompressor  
 29 142). Through the use of the hardware as configured in Figure 12b, the subscriber can select a

1 digital audio program for listening. The subscriber can accomplish such selection through a  
2 subscriber interface (not shown), which may exist at the set top terminal 220 or, alternatively, at  
3 the Level D hardware upgrade.

4 The Level D hardware upgrade allows the subscriber separate access to the digital radio  
5 channels while other programming (not necessarily radio) is being viewed on the television.  
6 Typically, this upgrade would be used for digital radio usage in a separate room from that of the  
7 television. The upgrade has a separate tuner, decompressor, and visual display. In the preferred  
8 embodiment a second remote control (which is preferably a scaled-down version of the set top  
9 terminal remote control, described below) is provided to access the digital audio system. This  
10 remote is equipped with a display.

11 The Level E hardware upgrade allows the subscriber to download large volumes of  
12 information from the operations center 202 or cable headend 208. The Level E hardware upgrade  
13 will enable subscribers to download data, such as books and magazines, to local storage.  
14 Primarily, the Level E hardware upgrade is an additional local storage unit (e.g., hard disk,  
15 floppy, optical disk or magnetic cartridge). Preferably, a small portable reader, called  
16 "EveryBook™", is also provided with the upgrade to enable downloaded text to be read without  
17 the use of a TV. The portable reader is equipped with a screen.

18 The downloadable information may be text or video supplied by the operations center 202  
19 or cable headend 208. With this upgrade, books may be downloaded and read anywhere with the  
20 portable reader. Using this upgrade, video may be downloaded and stored in compressed form  
21 for later decompression. The video would be decompressed only at the time of viewing.  
22 Important text that the public desires immediate access may made available through this system.  
23 Text such as the President's speech, a new law, or a recent abortion decision rendered by the  
24 Supreme Court may be made immediately available.

25 Using a more sophisticated port, such as the SCSI port, multiple hardware upgrade units  
26 may be connected, or "daisy-chained" together, to operate simultaneously. Although these  
27 upgrade units are described separately, the units may be combined or built into the set top  
28 terminal 220. Those skilled in the art will recognize variations on such combinations of and  
29 additions to the set top terminal hardware.

1                   d. Expansion Card Slot

2           In order to provide the greatest flexibility possible and prevent a set top terminal 220 from  
3 becoming outdated during the terminal's useful life, additional electronic expansion card slots  
4 have been built into the preferred embodiment. The expansion slots 665 (depicted in phantom  
5 in Figure 5) are covered by the metal plate cover 664 as shown in Figure 5. It is anticipated that  
6 additional memory or capabilities may be needed for certain customer features and also to update  
7 the system as the cable delivery system's capabilities increase.

8           In addition to providing an additional memory capability, the expansion card slot provides  
9 an easy method to upgrade the set top terminal hardware. In particular, expansion cards can be  
10 used to internally provide any of the Level A through E hardware upgrade features described  
11 above. Such embodiments, however, use the upstream data transmission hardware, also  
12 described above (or built-in modem).

13           Functionally, the expansion card (not shown) may be inserted into an expansion card slot  
14 665, causing the connector on the expansion card to electrically link with a card connector on the  
15 set top terminal 220. Preferably, the frame of the set top terminal has a shelf or rack position to  
16 hold the expansion card. The card connector on the set top terminal 220 may simply be an  
17 electrical connection to the set top terminal's microprocessor and/or memory device or devices.  
18 Alternatively, the interface between the expansion card and the set top terminal 220 may be an  
19 electrical bus that allows the memory resources of the set top terminal 220 to be directly  
20 expanded. In this case, the expansion card itself contains a memory device or devices that  
21 expand the amount of program information or data that the set top terminal 220 may access.  
22 Such memory devices include RAM, ROM, EPROM or EEPROM. In addition, the interface  
23 may be a "mailbox," which resides in the set top terminal 220 as a single memory location. This  
24 embodiment facilitates the transfer of data between the set top terminal 220 and the expansion  
25 card in either serial or parallel format. Such transfers are coordinated and controlled by the set  
26 top terminal's microprocessor 602.

27           The use of expansion cards lowers the cost of the set top terminal 220 itself, while also  
28 increasing its potential functionality. Thus, an expansion card may include enhanced functional



1 capabilities described as part of the upgrade module discussion above and be designed to  
2 accommodate any hardware upgrade compatible with the set top terminal 220.

### 3 4 3. Advanced Features and Functional Capabilities

#### 5 a. Overview

6 In the preferred embodiment, the set top terminal 220 will include features that are now  
7 being adopted in the industry, including parental controls and locks, electronic diagnostics and  
8 error detection, muting, on-screen volume control, sleep timer, recall of last selection, etc. Each  
9 of these features has a corresponding menu (or overlay menu) that allows on-screen customizing  
10 and activation of the feature.

11 The preferred set top terminal 220 also supports a number of advanced features and  
12 functional capabilities. This set top terminal 220 provides subscribers with a picture-on-picture  
13 capability without requiring a special television to support the capability. The set top terminal  
14 220 also supports a program catalogue Service, which provides subscribers with information on  
15 all programming available at its particular subscriber location. The set top terminal 220 further  
16 includes the capability of querying viewers to establish, among other things, favorite channel  
17 lists, personal profile data and mood information. The set top terminal 220 allows the subscriber  
18 to view promotional menus on future programming events.

19 The set top terminal 220 supports additional capabilities using its hardware upgrades that  
20 allow subscribers to use other interactive services, for example, to engage in on-line question and  
21 answer sessions, to order and confirm airline tickets, and to access a variety of other data  
22 services. The set top terminal 220 makes use of a digital tuner as a hardware upgrade to provide  
23 subscribers with a digital audio capability.

24 The preferred set top terminal 220 may be used to control video tape machines, thereby  
25 simplifying the recording of programs. The set top terminal 220 can, in conjunction with the  
26 program delivery system, easily support high definition television (HDTV). For subscribers  
27 living in remote locations, the set top terminal 220 accommodates backyard satellite systems.

28 In addition to all the features that the set top terminal 220 supports with its current  
29 internal programming and upgradeability, additional features may be added or existing features

1 increased through remote reprogramming of the set top terminal 220. Utilizing the resident  
2 operating system on the read only memory (ROM), the cable headend 208 is able to reprogram  
3 the random access memory (RAM) of the set top terminal 220. With this capability, the cable  
4 headend 208 can remotely upgrade software on the set top terminals 220.

5 Reprogramming will occur by using the program control information signal, with the  
6 appropriate signals sent over this signal. In an alternative embodiment, one channel is dedicated  
7 for the special programming needs. When reprogramming is to occur, the cable head end will  
8 send an interruption sequence on the program control information channel that informs the set  
9 top terminal 220 that reprogramming information is to follow.

#### 10 11 b. Promotional Menus

12 Figure 13 depicts the use of a promotional menu 1120 used to sell subscriptions to  
13 services in the system 200. This promotional menu is tailored to Level B interactive services  
14 which include a variety of on-line type services such as Prodigy, Yellow Pages, Airline  
15 Reservations, etc. A similar menu is used for Level A interactive services that offers subscribers  
16 additional information about programs such as quizzes, geographical facts, etc. Such information  
17 may be received by the set top terminal 220 in several data formats, including in the vertical  
18 blanking interval (VBI) and in the program control information signal.

19 Other promotion menus similar to menu 1120 may be used for the Level C interactive  
20 services. The Level C interactive services utilize local storage such as CD technology (e.g., 122)  
21 to offer an enormous range of multi-media experiences. The Level C interactive services require  
22 a hardware upgrade as described earlier. Specially adopted CD-I and CD-ROM 122 units are  
23 used for this service.

24 Typically, promotional menus may be generated when a subscriber selects a nonexistent  
25 channel, creating a virtual channel. Such virtual channels do not require any additional  
26 bandwidth since these channels do not carry any of the data required to create a promotional  
27 menu. Instead, when the subscriber selects a channel that does not exist (e.g., Channel 166), a  
28 virtual channel is created using data sent to the set top terminal in a number of ways. For  
29 example, the data may be sent in the vertical blanking interval (VBI) of another channel, out-of-

1 band, or with the menu information sent from the headend 208 in the set top terminal control  
2 information stream (STTCIS). The data will be used to create graphics stored locally at the set  
3 top terminal 220 as an NTSC video signal which may be displayed on the subscriber's television.  
4 In this way, a promotional menu may be drawn and a virtual channel is created. This capability  
5 simply provides the set top terminal 220 with the ability to display a promotional menu or  
6 graphics display whenever a nonexistent channel is selected by the subscriber.

7  
8 c. Other Interactive Services

9 Figures 14a and 14b show menus (1130 and 1132, respectively) that are available using  
10 the interactive Level A services. Referring to Figure 14a, when interactive Levels A services are  
11 available for a television program, the system will display an interactive logo 1134 consisting of  
12 the letter "I" and two arrows with semicircular tails. In the preferred embodiment, the set top  
13 terminal 220 will place the interactive logo on the television screen as an overlay menu. In the  
14 preferred embodiment, the set top terminal 220 will detect that there is data or information  
15 available about a television program which can be displayed to a subscriber using the interactive  
16 service. When the set top terminal 220 senses that there is interactive information available, it  
17 will generate the interactive logo overlay menu 1134 and place it on the television screen. For  
18 example, the set top terminal 220 will detect that information on a television program is being  
19 sent in the vertical blanking interval (VBI) and generate an interactive logo overlay menu 1134  
20 which will appear on the subscriber's television screen for approximately fifteen seconds during  
21 each ten minute interval of programming. Similarly, the set top terminal 220 can sense that the  
22 programming has closed caption information available and place a closed caption logo on the  
23 screen.

24 Referring to Figure 14b, when the subscriber sees the interactive logo 1134 on the  
25 television screen, the subscriber is made aware of the fact that interactive services are available  
26 in conjunction with his television program. If the subscriber presses the interactive remote  
27 control button, another overlay menu 1133 will be generated by the set top terminal 220 and  
28 placed on the screen. This overlay menu 1133 is shown in Figure 14b being overlayed on an  
29 interactive television program. From this menu 1133, the subscriber may select a variety of

1 different types of textual interactivity with the current television program, as at 1134, including  
 2 quizzes, fast facts, more info, where in the world, products, etc. At any time during the  
 3 interactive submenus, the user may return to the television program without interactive features.

4 Another submenu 1136 gives additional information related to the television program to  
 5 the viewer in textual form in the lower half of the screen. In Figure 14b, the submenu 1136  
 6 shows the available interactive options for the subcategory "quiz." In this interactive  
 7 subcategory, the user is presented with questions and a series of possible answers. If the  
 8 subscriber desires, the subscriber selects one of the answers to the quiz question. After the  
 9 selection, the set top terminal 220 sequences to another menu. The set top terminal 220  
 10 sequences to the interactive quiz answers submenu which informs the subscriber whether the  
 11 correct answer was or was not chosen. Subsequently, another submenu would show correctly  
 12 or incorrectly answered quiz question.

13 Figure 15a is an example of a submenu for Level B interactive services. From this menu  
 14 screen 1141, any of a number of on-line data services could be accessed. One service, the airline  
 15 reservations selection 1142, has been chosen by the subscriber on this menu.

16 In selecting airline reservations, the subscriber encounters a sequence of menus as for any  
 17 on-line data service. Referring to Figure 15b, the subscriber is typically shown a submenu, such  
 18 as submenu 1144, for the data service offering various options. In each of these submenus  
 19 related to a data service, the subscriber is able to exit, returning to the home menu 1010 or regular  
 20 cable TV.

21 Figure 15b, the airline information and reservation submenu 1144, allows a subscriber  
 22 to view six available flights. A subscriber may select one of the flights to check on its  
 23 availability. Another similar submenu allows a subscriber to enter the month, day and year for  
 24 the availability date desired. In this submenu, the subscriber is offered the option of correcting  
 25 any errors in the entered information.

26 Figure 15c is another airline submenu 1150 that allows a subscriber to view remaining  
 27 seats available on a flight, enabling the selection of a seat assignment. This interactive submenu  
 28 1150 is an example of how information may be graphically shown to a subscriber using a portion  
 29 of the menu and different coloring schemes. In this interactive menu, the lower half of the screen

1 1152 shows the passenger compartment of an airplane with all the seat locations graphically  
2 represented by square blocks. By coloring the available seat locations in blue and the unavailable  
3 seat locations in a different color, the menu can present a great deal of information in a limited  
4 amount of space. This graphic presentation of information for the interactive on-line data  
5 services is an important method of visually displaying large amounts of information to the  
6 subscriber.

7 Referring to Figure 15d, another submenu 1156 allows the subscriber to choose a one-  
8 way or round-trip ticket, to confirm reservations and to charge an airline ticket by credit card,  
9 choosing the appropriate strip menu on the lower part of the screen. In this particular menu 1156,  
10 the subscriber is charging a round-trip plane ticket on a credit card. The subscriber simply needs  
11 to enter the credit card number, expiration date, and credit card type to charge an airline ticket.  
12 Other submenus may process the subscriber's credit card charge for the airline ticket, confirm  
13 the subscriber's airline ticket purchase, and pass this information to the location where the ticket  
14 is printed.

15 Using the methods and hardware described, a variety of interactive services are possible.  
16 Those skilled in the art will recognize that such interactive services may be accommodated by  
17 the preferred set top terminal 220.

18  
19 The terms and descriptions used herein are set forth by way of illustration only and are  
20 not meant as limitations. Those skilled in the art will recognize that numerous variations are  
21 possible within the spirit and scope of the invention as defined in the following claims and their  
22 equivalents.

23  
24 What we claim is:

## CLAIMS

1  
2  
3 **1.** A hardware upgrade for a terminal for use with a television program delivery system,  
4 the hardware upgrade comprising:  
5 an interface to the terminal; and  
6 a disc storage device connected to the interface.  
7

8 **2.** The hardware upgrade of claim **1** wherein data stored on the disc storage device  
9 concerns one or more applications selected from a group consisting of games, education,  
10 encyclopedias, reference, and economics.  
11

12 **3.** The hardware upgrade of claim **1** further comprising a microprocessor connected  
13 between the interface and the disc storage device.  
14

15 **4.** The hardware upgrade of claim **3** further comprising programming instructions that  
16 execute on the microprocessor, wherein the programming instructions access data stored on  
17 the disc storage device.  
18

19 **5.** The hardware upgrade of claim **4** wherein the interface to the terminal transfers, to the  
20 hardware upgrade, information concerning television programs, and the programming  
21 instructions comprise:  
22 programming instructions to monitor the information concerning television programs;  
23 and  
24 programming instructions to retrieve data stored on the disc storage device in response  
25 to the information concerning television programs.  
26

27 **6.** The hardware upgrade of claim **1** wherein the interface to the terminal comprises a  
28 multipin connector.  
29

1     **7.**     The hardware upgrade of claim **6** wherein the multipin connector is a multipin  
2 connector ranging from type DB9 to type DB25.

3  
4     **8.**     The hardware upgrade of claim **1** wherein the interface to the terminal comprises a  
5 SCSI connector.

6  
7     **9.**     The hardware upgrade of claim **1** wherein the disc storage device is a compact disc  
8 storage device.

9  
10    **10.**    The hardware upgrade of claim **9** wherein the compact disc storage device is a CD-  
11 ROM device.

12  
13    **11.**    A terminal for use with a television program delivery system, the terminal comprising:  
14 a receiver adapted to receive programs; and  
15 a first hardware upgrade comprising:  
16            an interface to the terminal; and  
17            a disc storage device connected to the interface.

18  
19    **12.**    The terminal of claim **11** further comprising a display that indicates when the first  
20 hardware upgrade is in use.

21  
22    **13.**    The terminal of claim **11** wherein the terminal has an expansion card slot, and wherein  
23 the interface comprises at least one card connector adapted for use with the expansion card  
24 slot.

25  
26    **14.**    The terminal of claim **11** wherein the terminal is a set top terminal.

27  
28    **15.**    The terminal of claim **11** wherein the terminal is an HDTV terminal.

1   **16.**    The terminal of claim **11** further comprising:

2           one or more additional hardware upgrades connected to the terminal.

3  
4   **17.**    The terminal of claim **16** wherein the first hardware upgrade and the one or more  
5   additional hardware upgrades are connected in a daisy-chain arrangement.

6  
7   **18.**    The terminal of claim **17** wherein each of the first hardware upgrade and the one or  
8   more additional hardware upgrades comprises a SCSI connector, and the daisy-chain  
9   arrangement is a SCSI daisy-chain arrangement.

10  
11   **19.**    The terminal of claim **16** wherein the first hardware upgrade and the one or more  
12   additional hardware upgrades are capable of operating simultaneously.

13  
14   **20.**    The terminal of claim **16** wherein at least one of the one or more additional hardware  
15   upgrades is selected from the group consisting of an audio program reception hardware  
16   upgrade, an interactive hardware upgrade that receives interactive subscriber input and  
17   produces interactive output, and a modem hardware upgrade.

18  
19   **21.**    The terminal of claim **11** wherein the disc storage device is a compact disc storage  
20   device.

21  
22   **22.**    The terminal of claim **21** wherein the compact disc storage device is a CD-ROM  
23   device.

24  
25   **23.**    A system comprising:  
26           a television program delivery system adapted to deliver television program signals;  
27   and  
28           a terminal comprising:  
29           a receiver adapted to receive the television program signals; and



1 a hardware upgrade comprising:  
2 an interface to the terminal; and  
3 a disc storage device connected to the interface.  
4

5 **24.** The system of claim **23** wherein the television program delivery system is a cable  
6 television program delivery system.  
7

8 **25.** The system of claim **24** wherein the cable television program delivery system  
9 comprises an operations center, the operations center transmitting one or more of the  
10 programs to the terminal.  
11

12 **26.** The system of claim **24** wherein the cable television program delivery system  
13 comprises one or more headends, a particular one of the one or more headends transmitting  
14 one or more of the programs to the terminal.  
15

16 **27.** The system of claim **23** wherein the television program delivery system is a satellite  
17 broadcast system.  
18

19 **28.** The system of claim **23** wherein the terminal is an HDTV terminal.  
20

21 **29.** The terminal of claim **23** wherein the disc storage device is a compact disc storage  
22 device.  
23

24 **30.** The terminal of claim **29** wherein the compact disc storage device is a CD-ROM  
25 device.  
26

27 **32.** A television terminal comprising:  
28 a television program receiver;  
29 a disc storage device; and

1 an output connected to the receiver and the storage device, wherein the output accepts  
2 television program signals from the receiver and data signals from the storage device.

3  
4 **33.** The television terminal of claim **32** wherein the output is a video display.

5  
6 **34.** The television terminal of claim **32** wherein the output is a connector port.

7  
8 **35.** The television terminal of claim **32** wherein data stored on the disc storage device  
9 concerns one or more applications selected from a group consisting of games, education,  
10 encyclopedias, reference, and economics.

11  
12 **36.** The television terminal of claim **32** further comprising a microprocessor connected to  
13 the disc storage device.

14  
15 **37.** The television terminal of claim **36** further comprising programming instructions that  
16 execute on the microprocessor, wherein the programming instructions access data stored on  
17 the disc storage device.

18  
19 **38.** The television terminal of claim **37** wherein the interface to the terminal transfers, to  
20 the hardware upgrade, information concerning television programs, and the programming  
21 instructions comprise:

22 programming instructions to monitor the information concerning television programs;  
23 and  
24 programming instructions to retrieve data stored on the disc storage device in response  
25 to the information concerning television programs.

26  
27 **39.** The television terminal of claim **32** wherein the television terminal is an HDTV  
28 terminal.

1   **40.**    The television terminal of claim **23** wherein the disc storage device is a compact disc  
2   storage device.

3  
4   **41.**    The television terminal of claim **40** wherein the compact disc storage device is a CD-  
5   ROM device.

6  
7   **42.**    A method comprising:  
8       receiving a television program;  
9       accessing data using a disc storage device; and  
10      displaying the television program and/or information based on the accessed data.

11  
12   **43.**    The method of claim **42** wherein the disc storage device is a CD-ROM.

13  
14   **44.**    The method of claim **42** further comprising:  
15      processing the data stored on the disc storage device.

16  
17   **45.**    The method of claim **42** wherein the accessed data concerns one or more applications  
18   selected from a group consisting of games, education, encyclopedias, reference, and  
19   economics.

20  
21   **46.**    The method of claim **42** wherein the accessing step is performed in response to  
22   receiving the television program.

23  
24   **48.**    The method of claim **42** further comprising:  
25      receiving information concerning programs;  
26      monitoring the information concerning programs; and  
27      wherein the accessing step is performed in response to the monitoring step.

1   **49.**    The method of claim **48** wherein the information concerning programs is received in a  
2   vertical blanking interval.

3  
4   **50.**    The method of claim **48** wherein the information concerning programs is received in a  
5   program control information signal.

6  
7   **51.**    The method of claim **42** further comprising:  
8       receiving subscriber input;

9  
10   **52.**   The method of claim **51** further comprising:  
11       remotely receiving the subscriber input.

12  
13   **53.**   The method of claim **51** further comprising:  
14       generating a menu on a television;  
15       receiving menu selections from one or more menus, wherein the subscriber input  
16       comprises menu selections.

17  
18   **54.**   The method of claim **51** wherein the accessing step is performed in response to  
19       receiving the subscriber input.

20  
21   **55.**   The method of claim **42** wherein the disc storage device is a compact disc storage  
22       device.

23  
24   **56.**   The method of claim **55** wherein the compact disc storage device is a CD-ROM  
25       device.

## ABSTRACT OF THE DISCLOSURE

The invention relates to apparatus and methods for a television terminal with data storage. The television terminal may be a set top terminal for use with a cable television program delivery system. The data storage may be integral to the terminal or may be provided as a hardware upgrade unit or expansion card connected to the terminal to modularly enhance the functionality of the terminal. The data storage may be in the form of a disc, such as a compact disc storage device or a CD-ROM. The data stored on the storage device may relate to games, education, encyclopedias, reference, or economics. The television terminal may additionally include a microprocessor that is programmed to react to information within a television signal to access the data stored on the storage device.

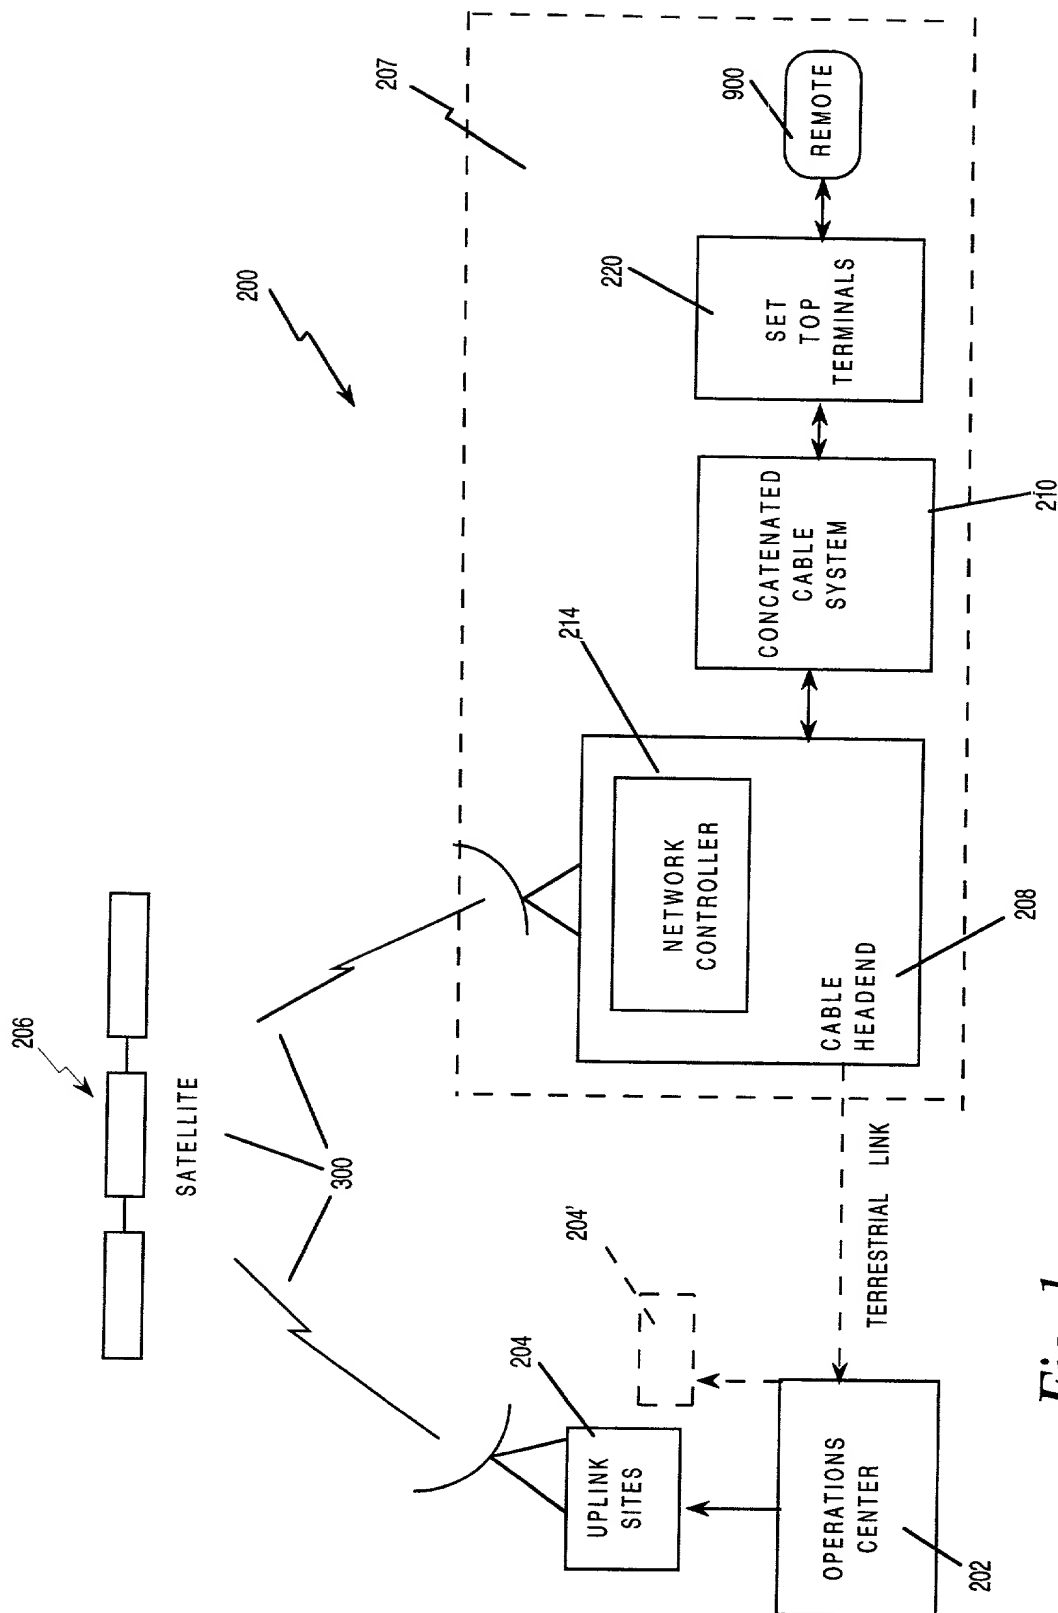
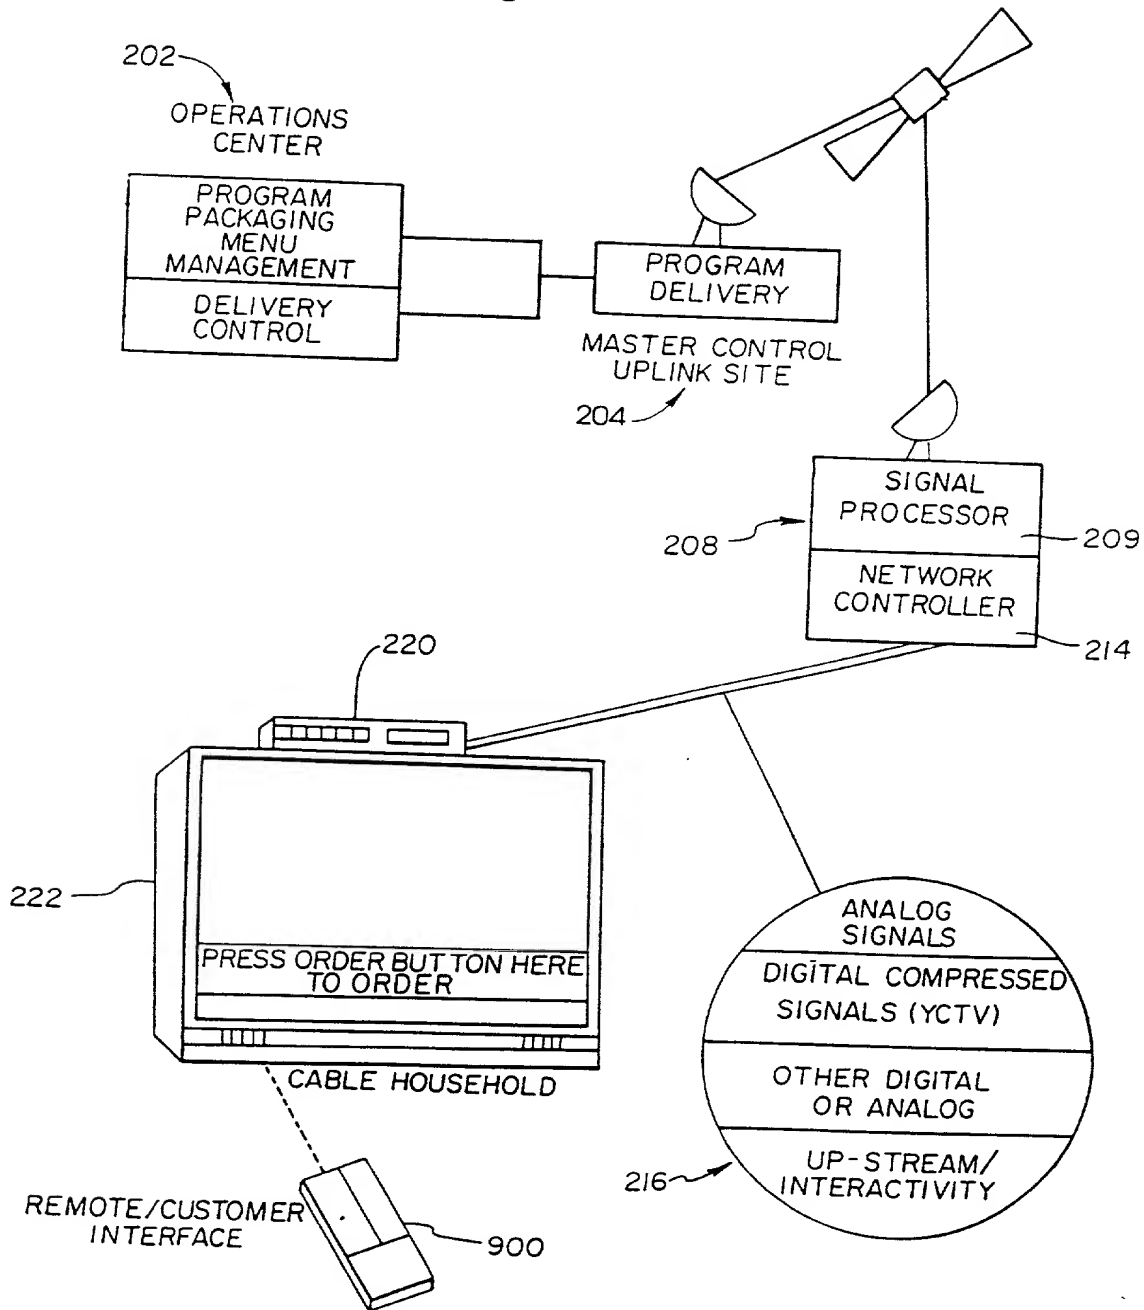


Fig. 1

Fig. 2





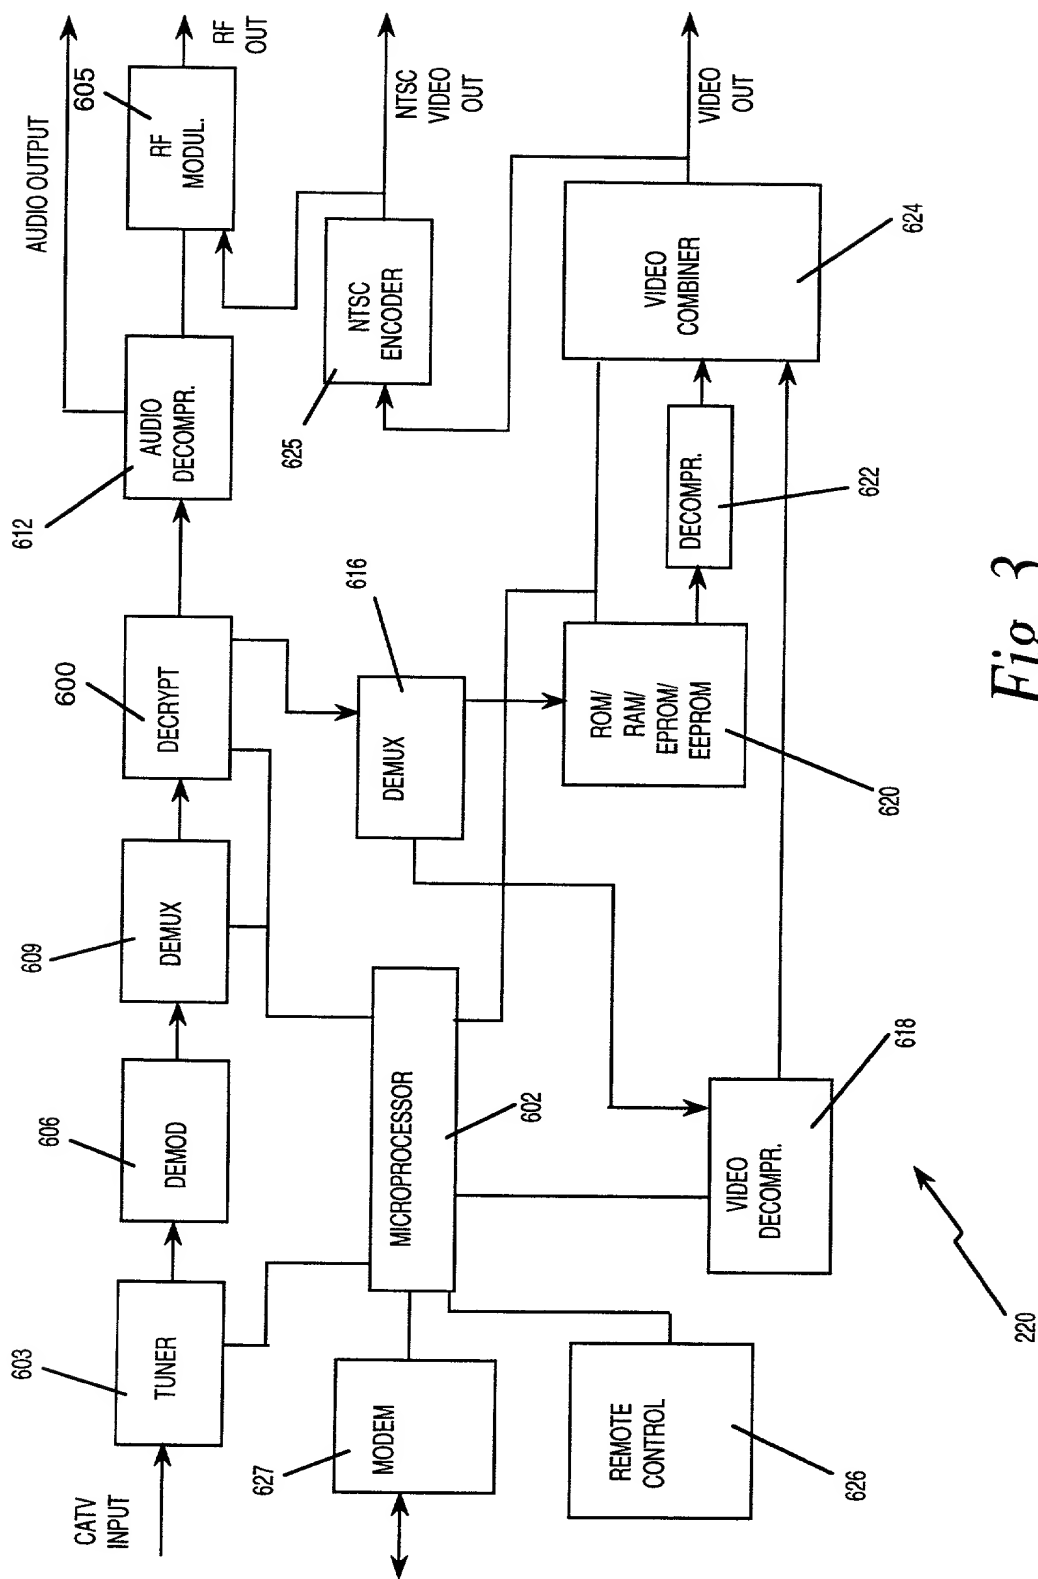


Fig. 3




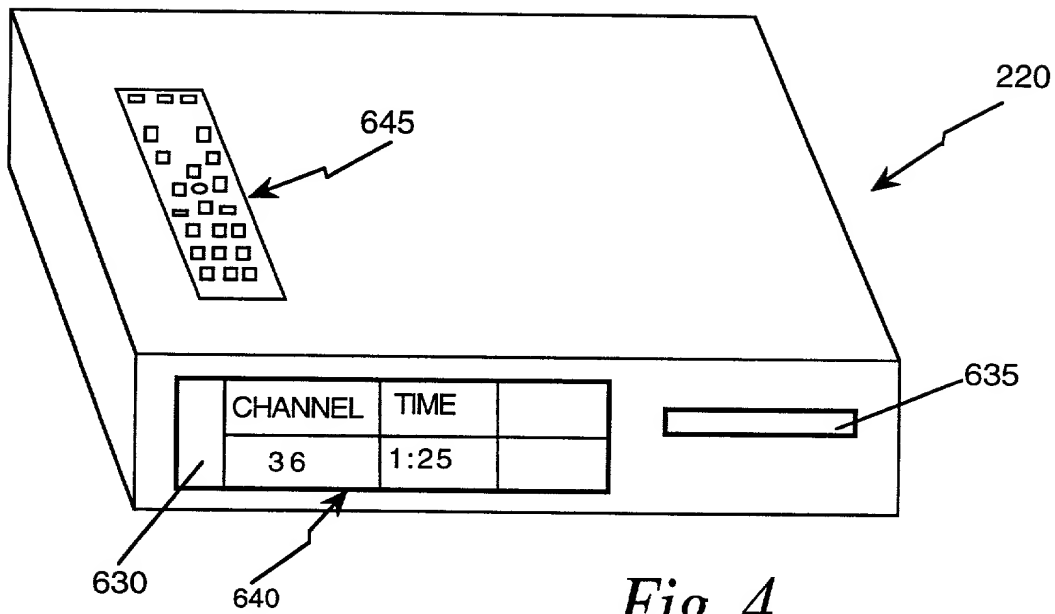

*Fig. 4*

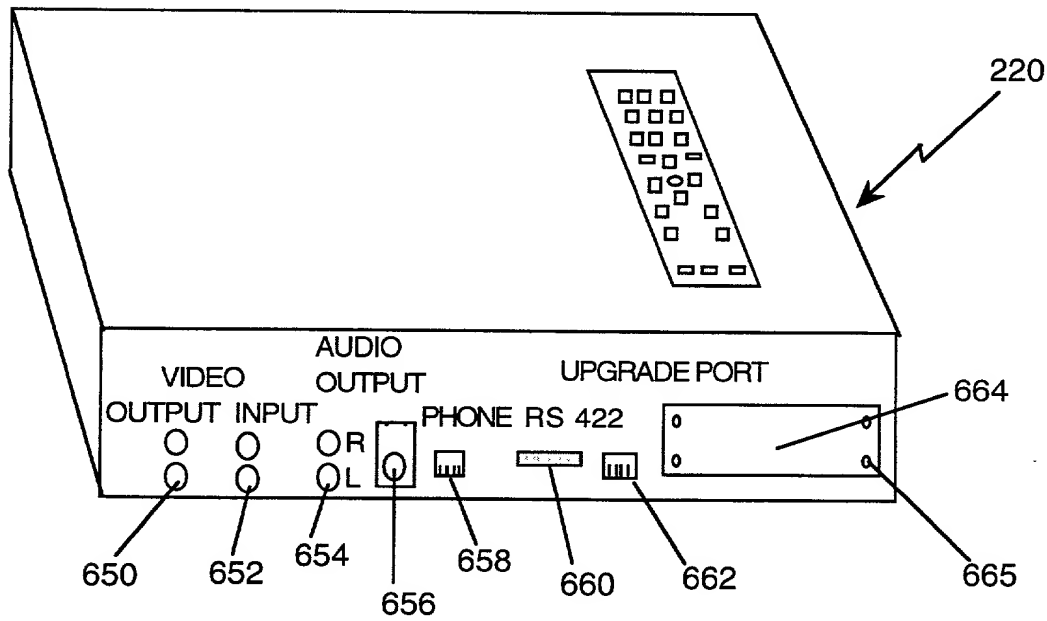

*Fig. 5*

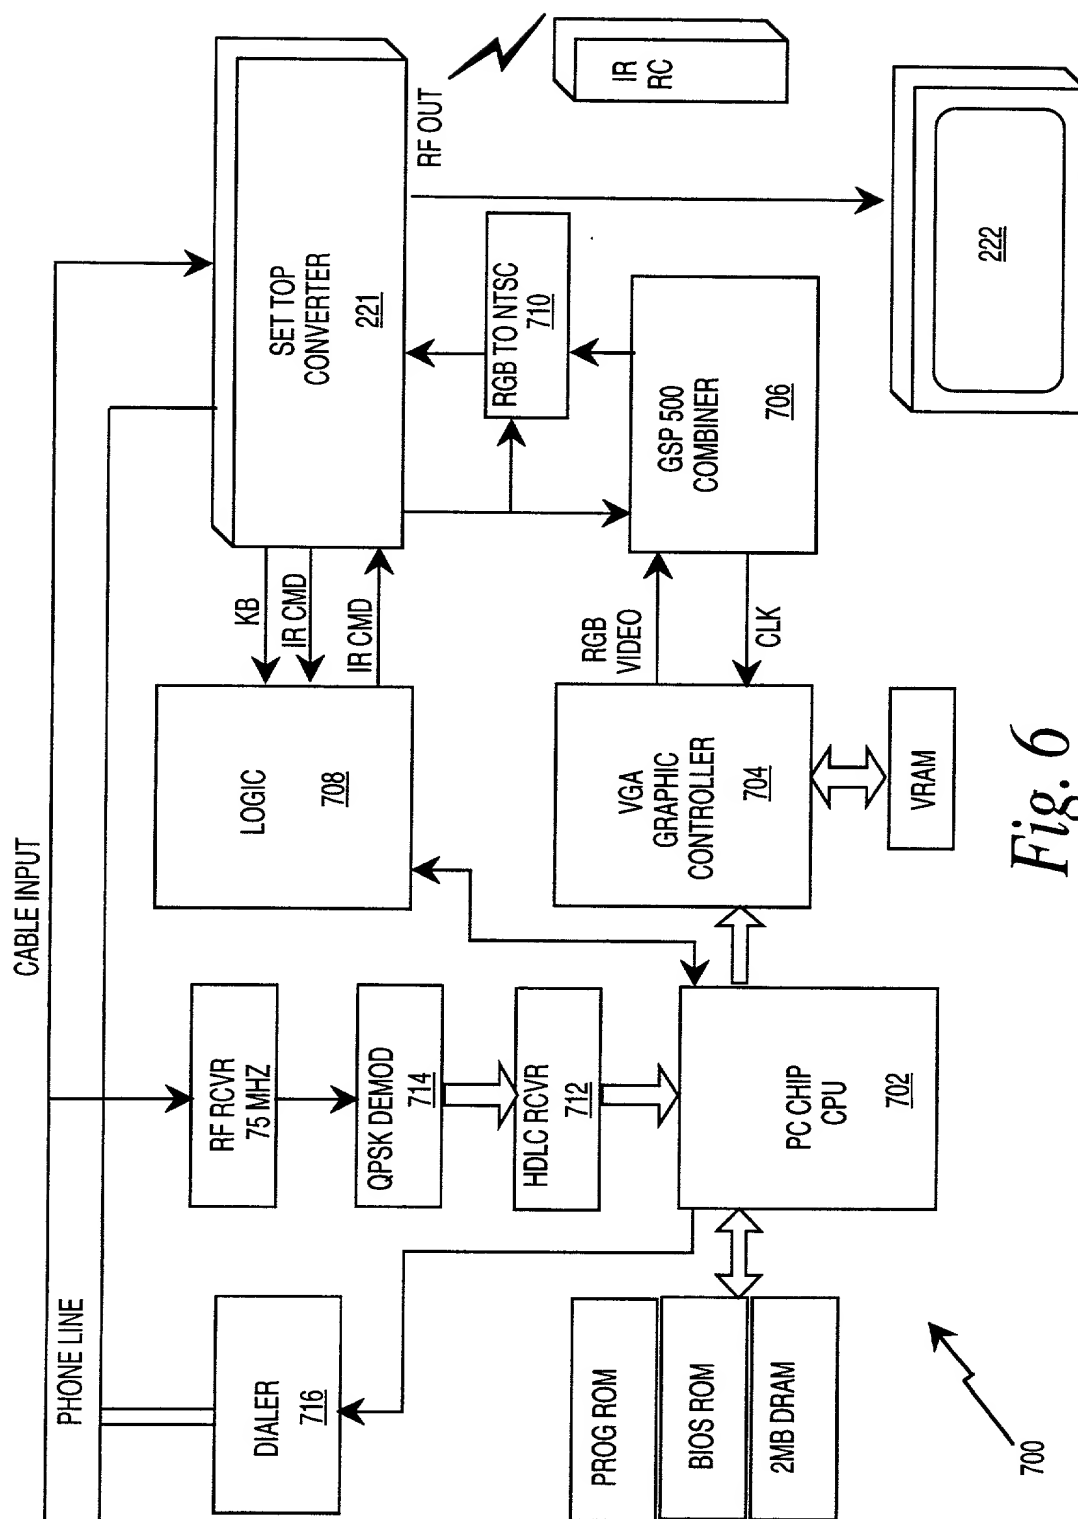

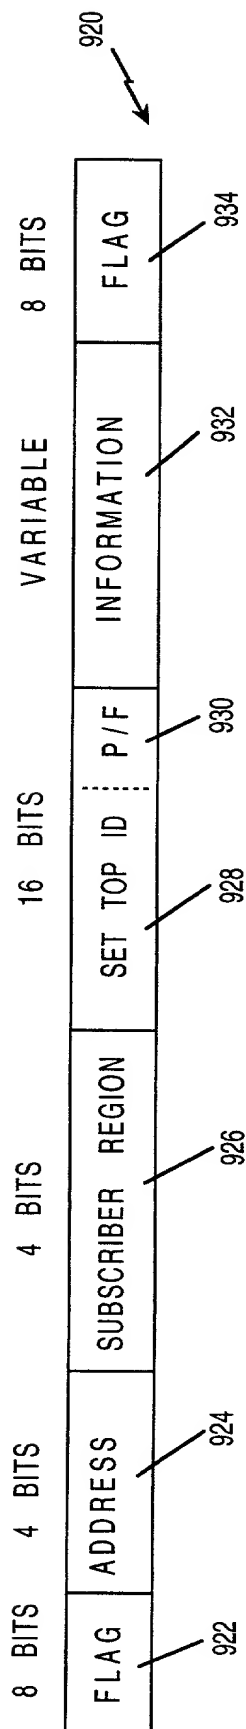


Fig. 7a




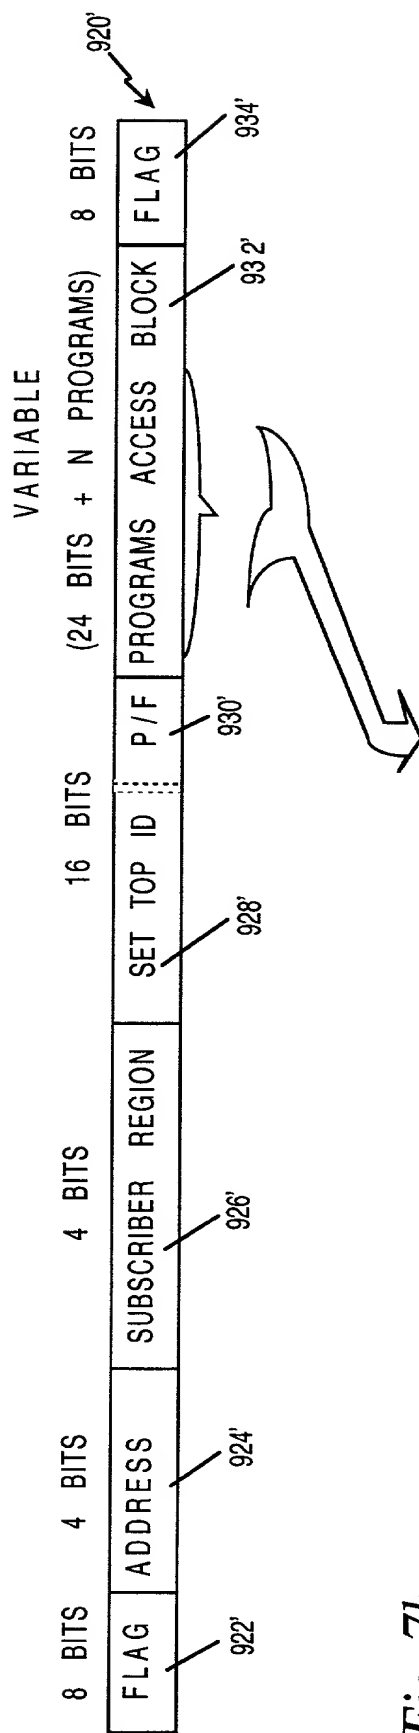



Fig. 7b

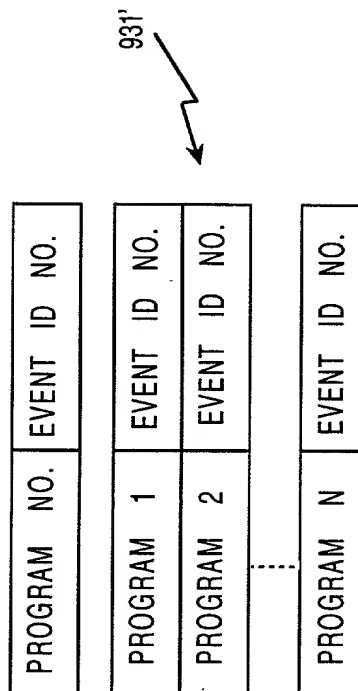

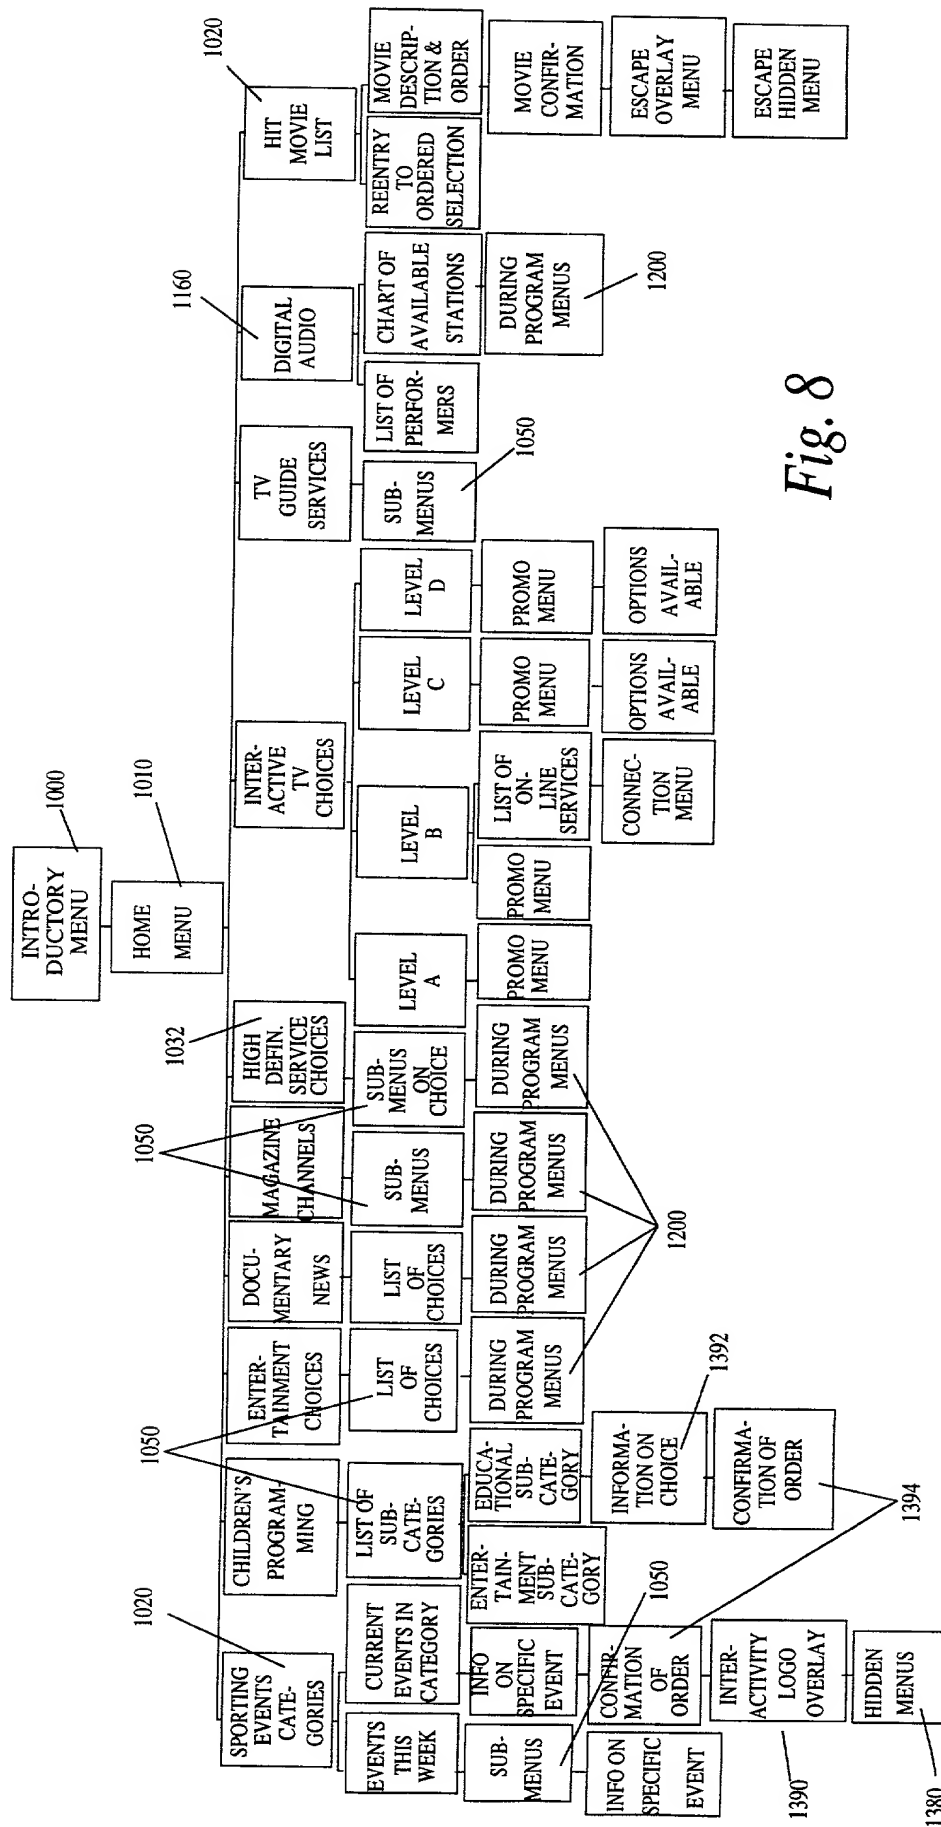

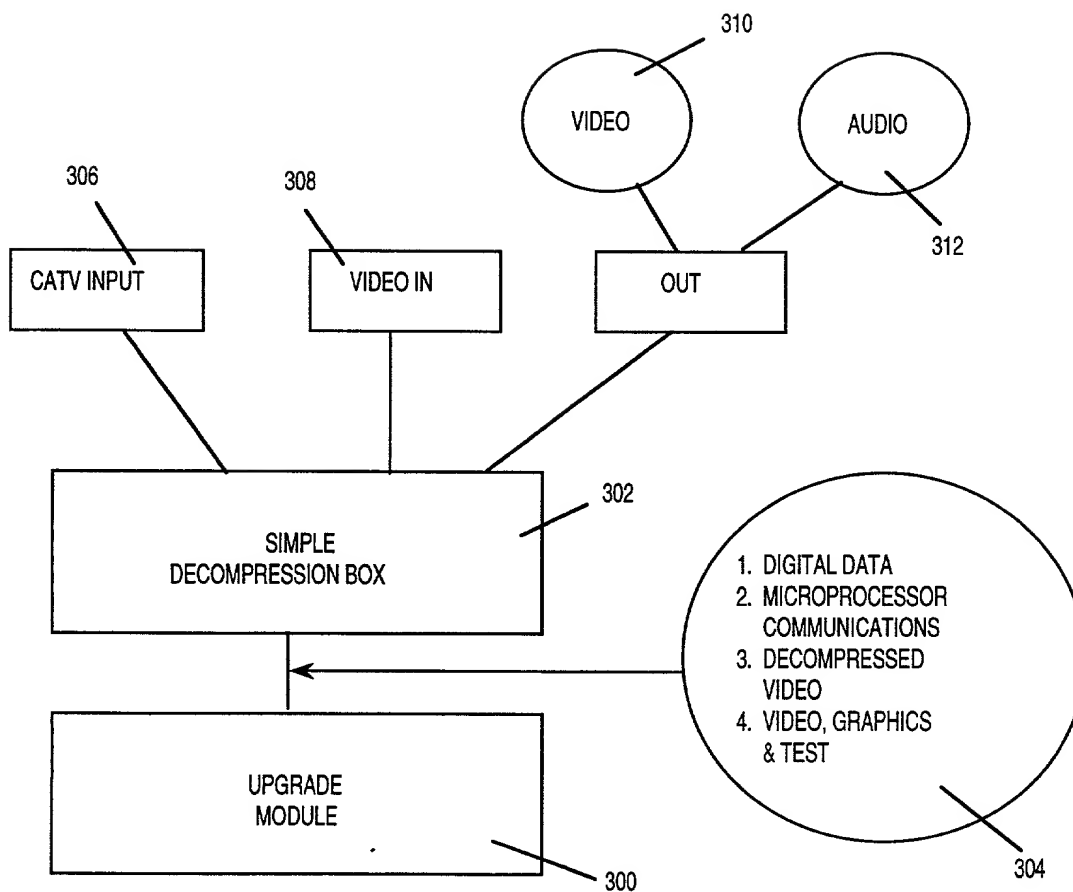

*Fig. 9a*

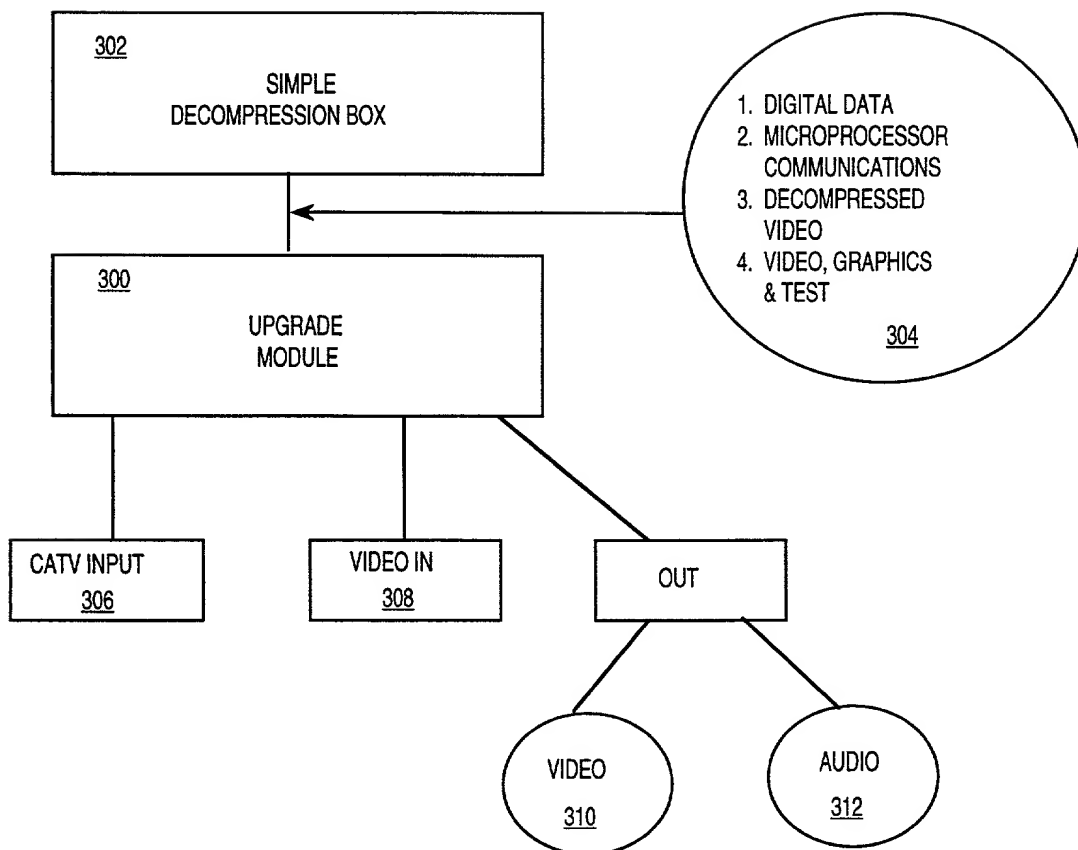

*Fig. 9b*


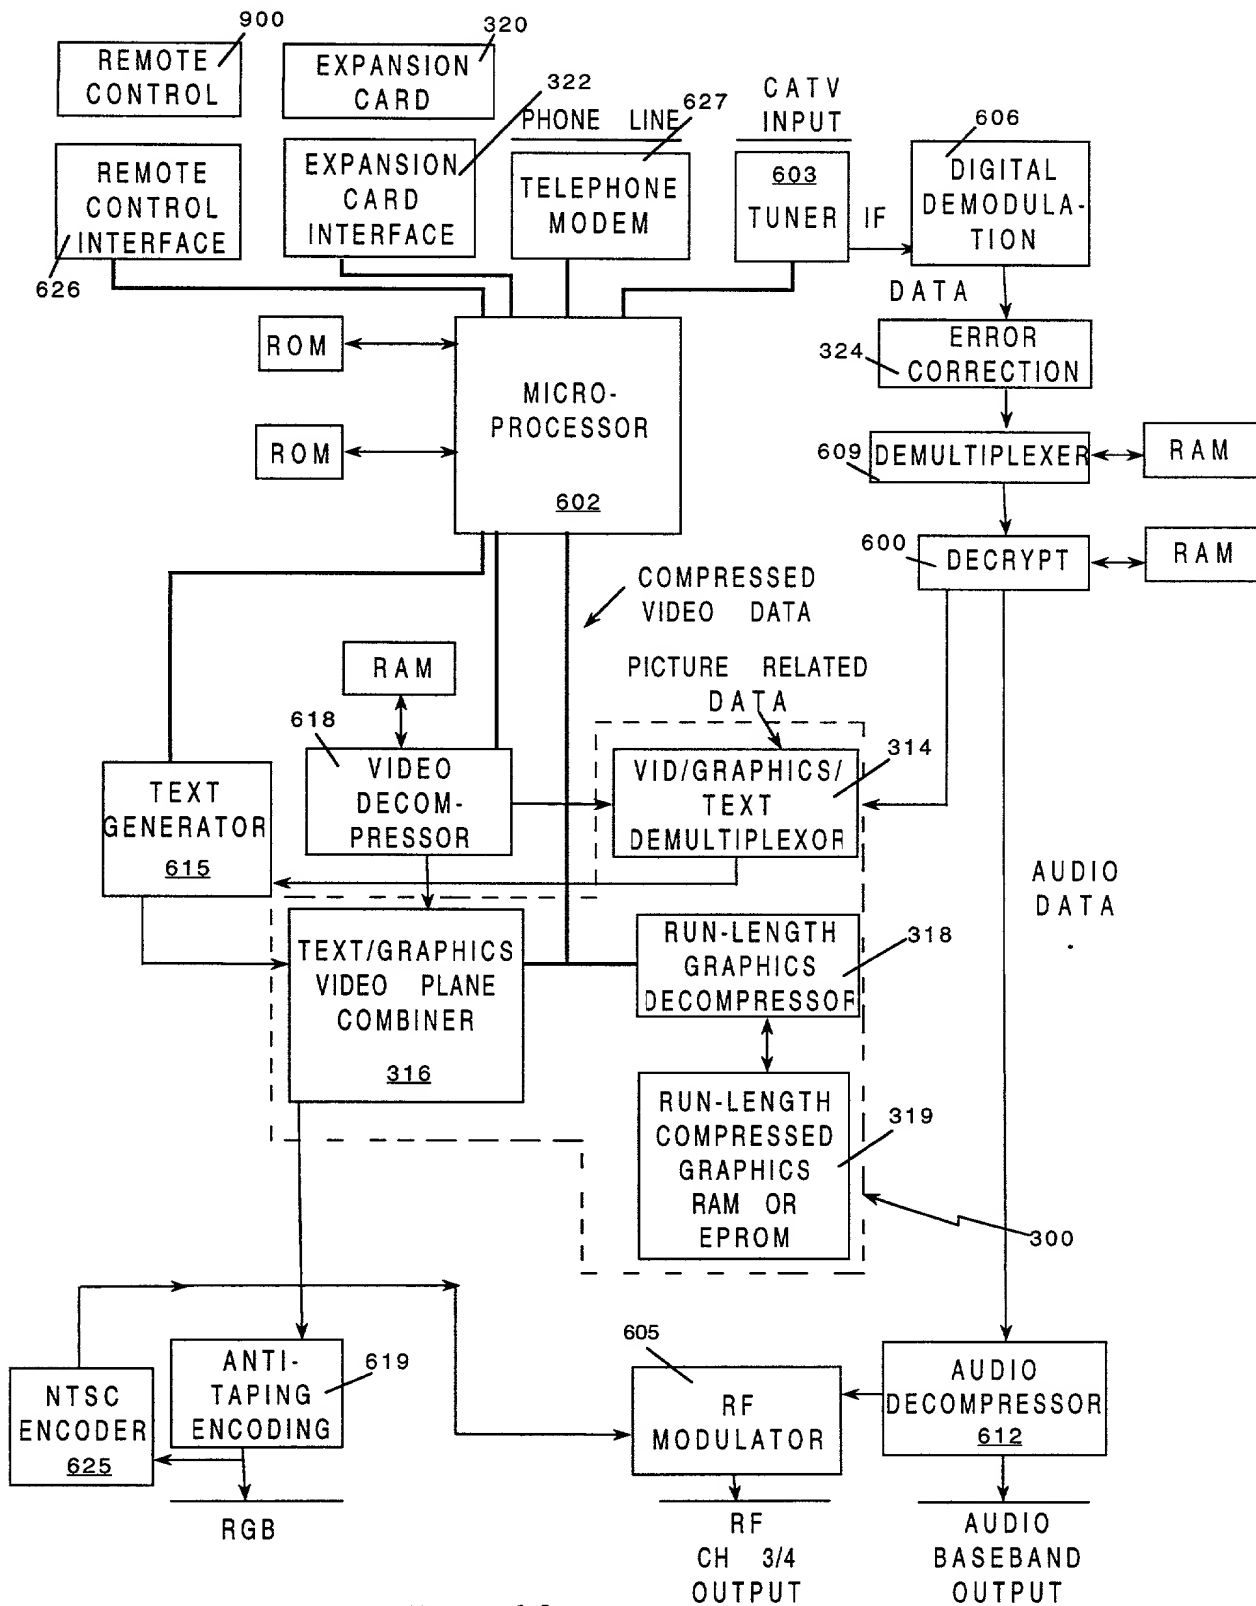


Fig. 10

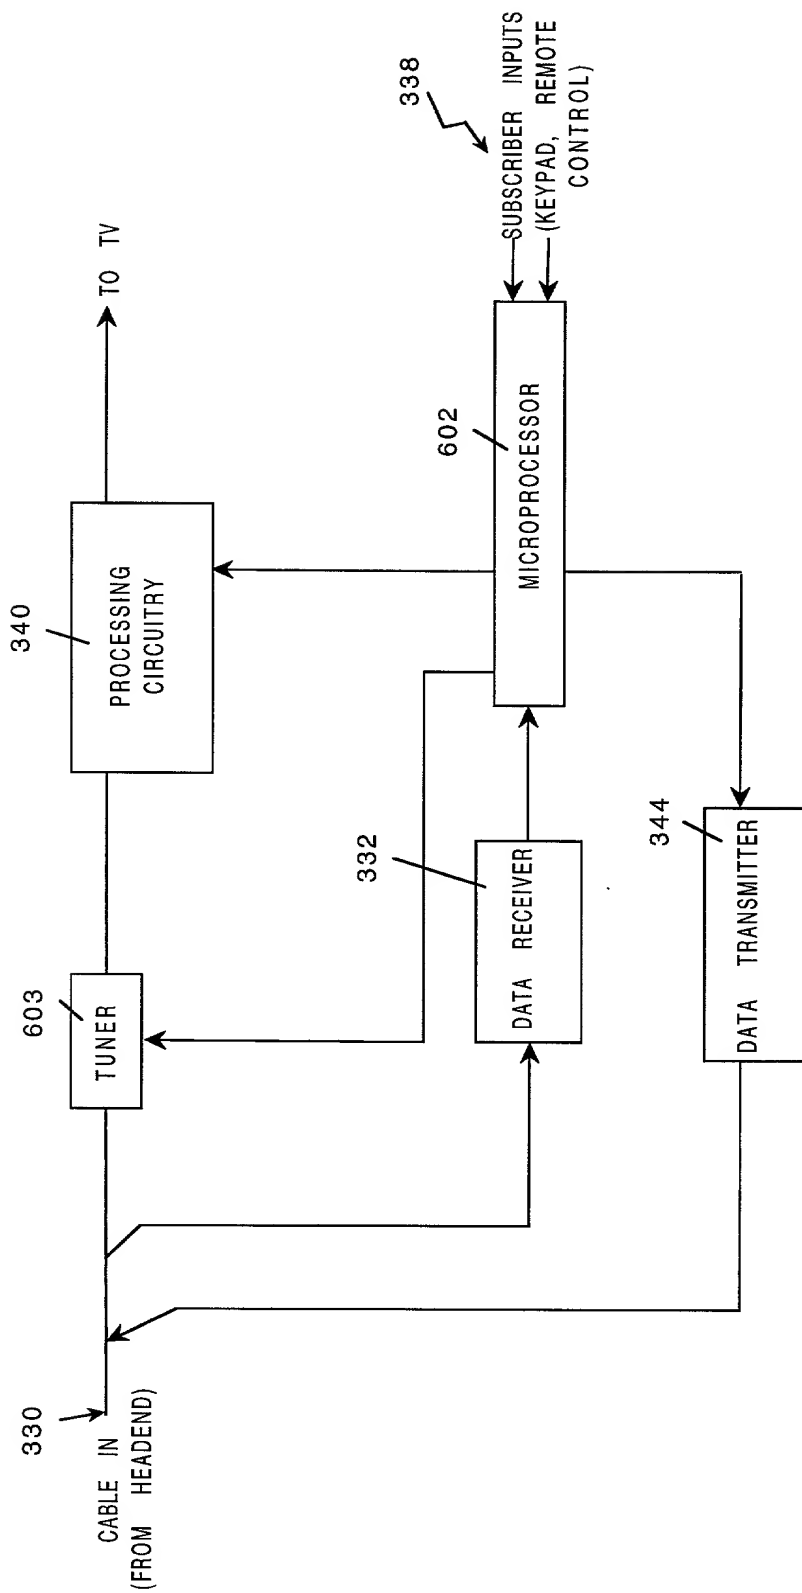

SET TOP TERMINAL UPSTREAM DATA TRANSMISSION HARDWARE

Fig. 11



FIG. 12a is a block diagram of a system 100 for providing a user interface to a set-top terminal 220. The system 100 includes a microprocessor 104, a tuner 603, receiver components 601, upstream data transmission components 604, and bubble memory 112. The microprocessor 104 is connected to the tuner 603, receiver components 601, upstream data transmission components 604, and bubble memory 112. The tuner 603 is connected to the receiver components 601. The receiver components 601 are connected to the upstream data transmission components 604. The upstream data transmission components 604 are connected to the set-top terminal 220. The bubble memory 112 is connected to the microprocessor 104. The system 100 also includes interactive software 106, processing circuitry 108, memory 120, and a modem/CD-ROM interface 122. The microprocessor 104 is connected to the interactive software 106, processing circuitry 108, memory 120, and the modem/CD-ROM interface 122. The system 100 is connected to a CATV input and an upstream RF data output.

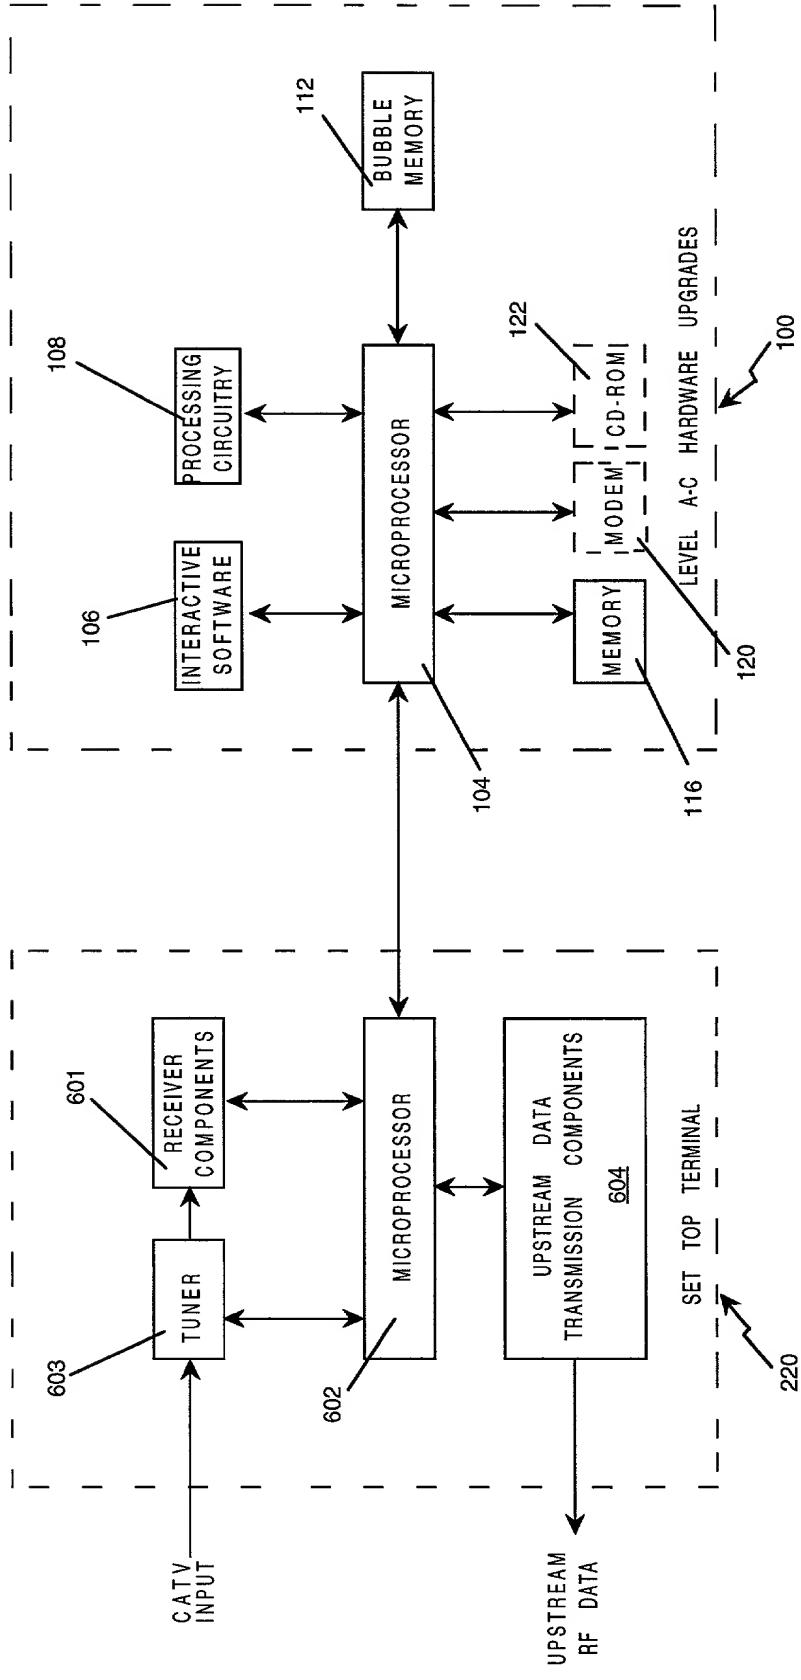


Fig. 12a


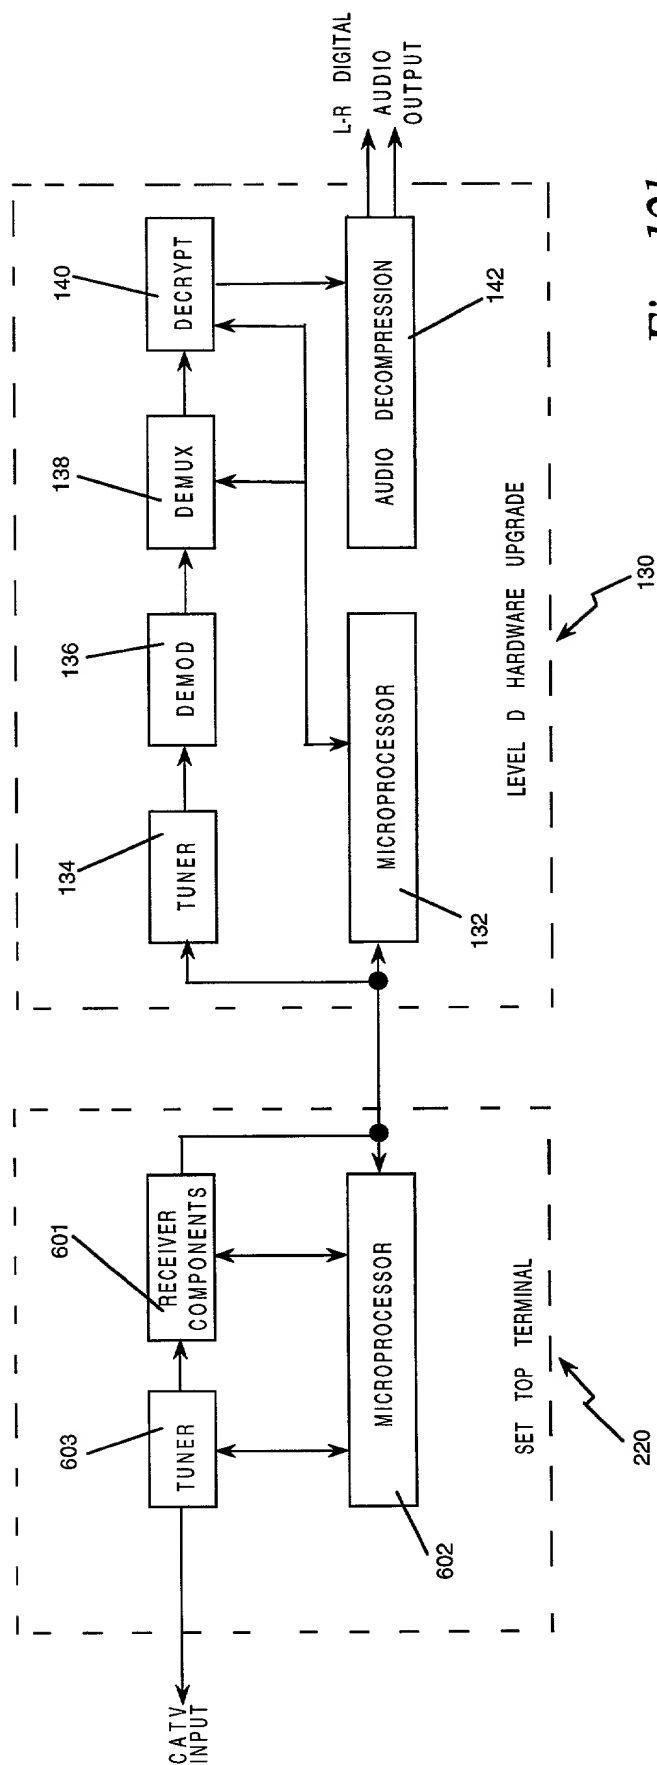


Fig. 12b

Fig. 13

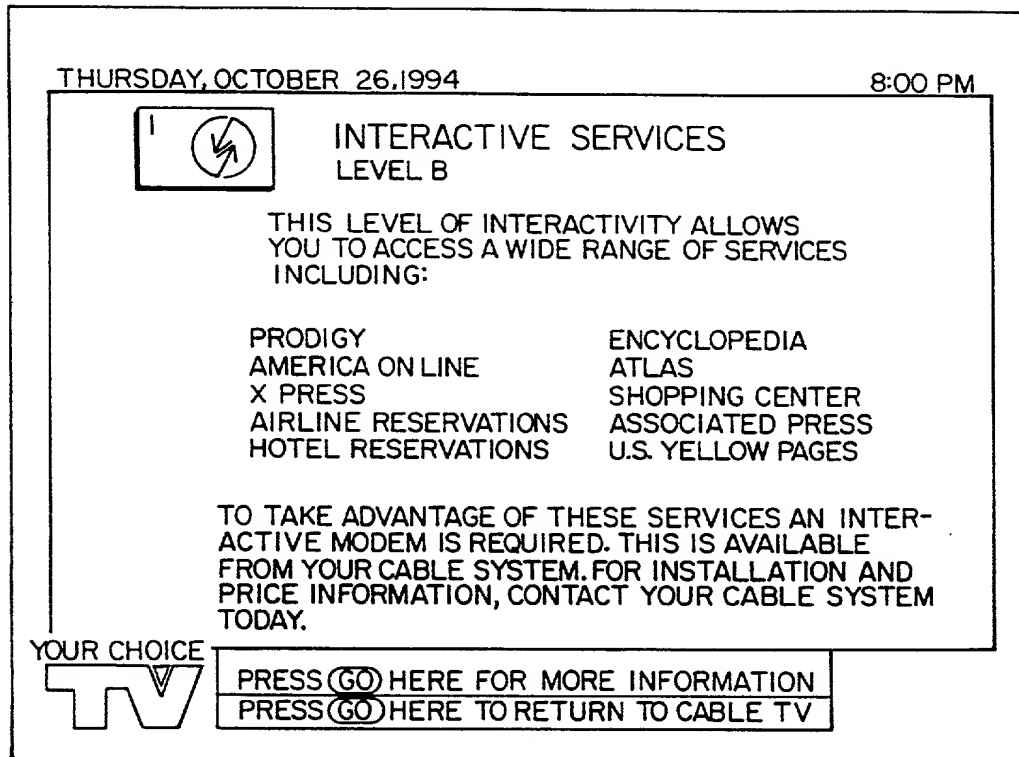

*Fig. 14a*

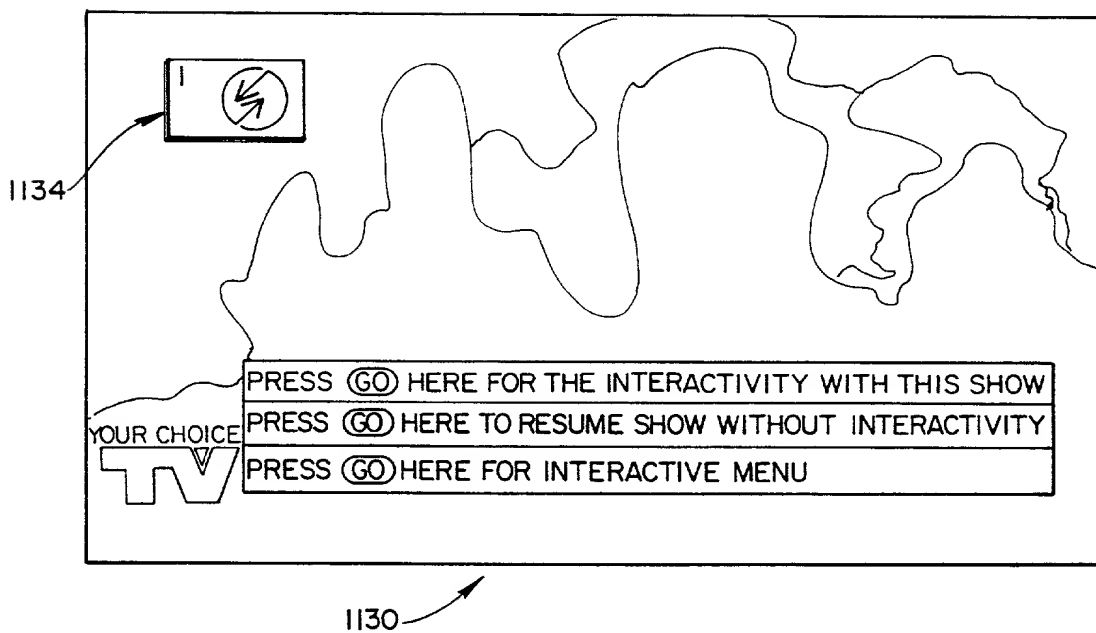


Fig. 14b


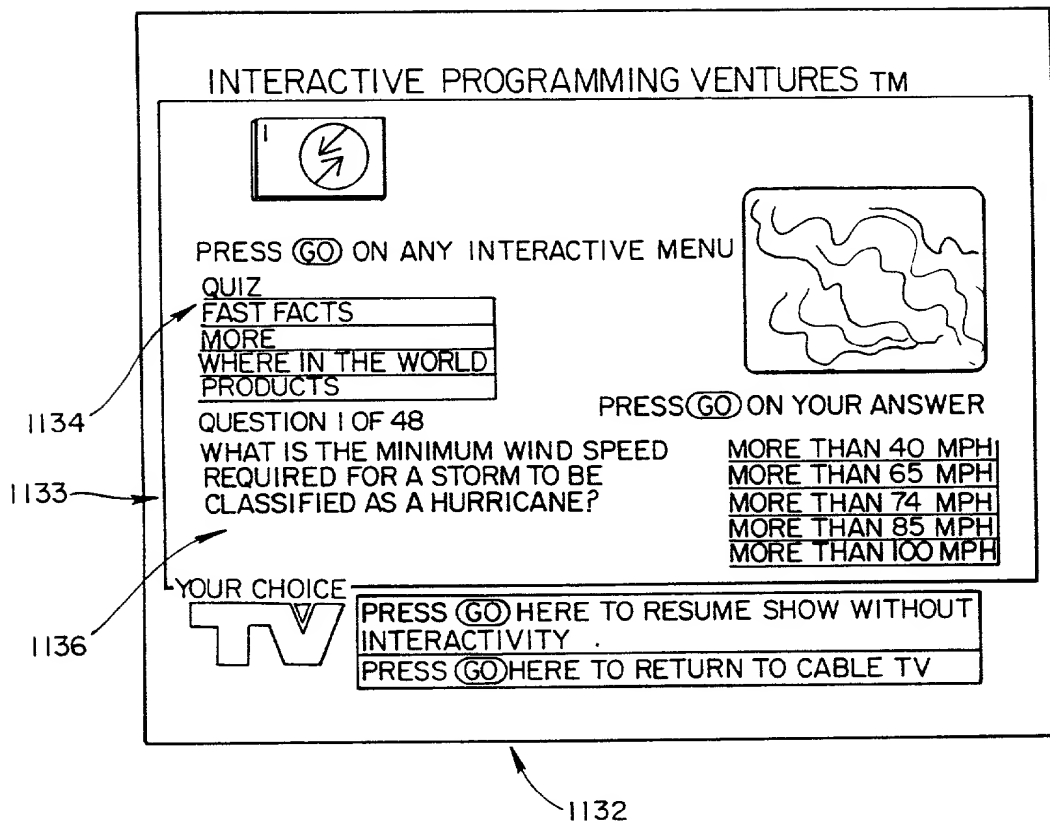


Fig. 15a



8:04 PM

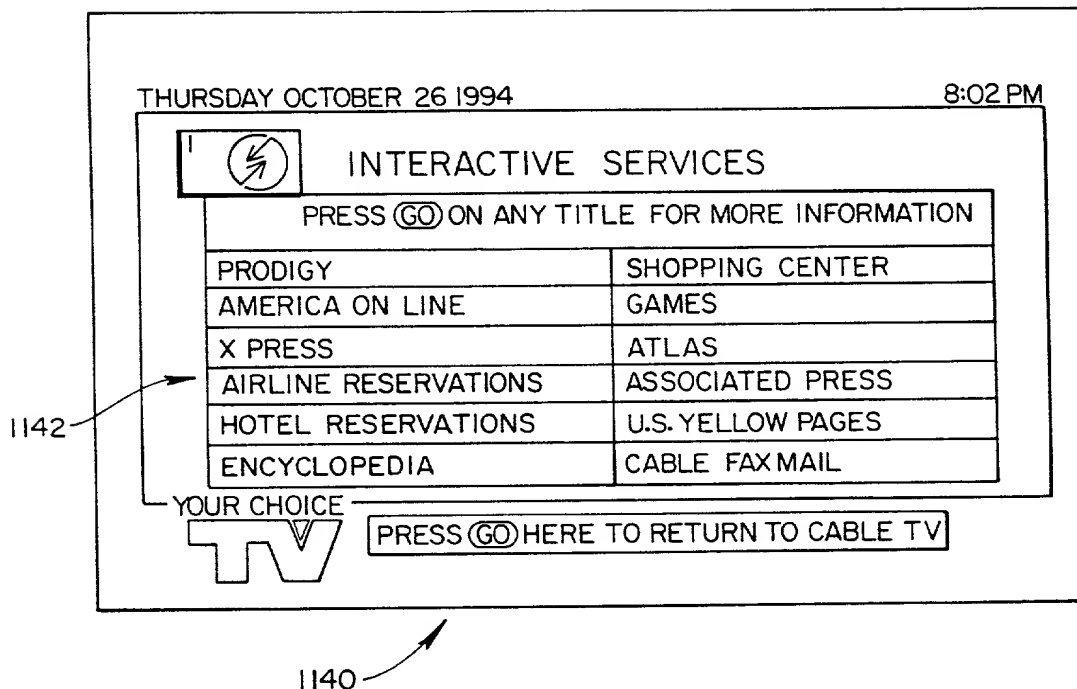

## Press on Any Flight to Check Availability and Fare

Depart Time	Arrive Time	Airline	Flight No.	Stops	Connecting Through
6:15 AM	1:30 PM	AMERICAN	32	0	
7:30 AM	2:45 PM	AMERICAN	212	0	
8:00 AM	3:07 PM	DELTA	49	0	
10:30 AM	7:15 PM	US AIR	285	1	Chicago
11:25 AM	6:10 PM	UNITED	10	0	
11:45 AM	8:40 PM	UNITED	77	1	Dallas

Press  Here to Return to Airline Main Menu


**Press  Here to Return to Menu!**

Press **GO** Here to Return to Cable TV

*Fig. 15b*

Thursday, October 26, 1994

8:05PM



## AIRLINE INFORMATION AND RESERVATIONS(continued)



















































































































































































































DELTA FLIGHT #49 from Phoenix to Dulles direct  
departs 8:00 AM and arrives 3:07 PM

SEATS AVAILABLE ARE SHOWN IN BLUE


3 First Class Seats Remaining

15 Coach Class Seats Remaining

Press  on Any Blue Seat(s) to Make Reservations

First Class										Coach Class										Aircraft Equipment 757									
																													
																													
																													
																													
																													
																													
																													

1152

Press  Here to Erase Above and Repeat

Press  Here to Cancel Above and Exit

Press  Here to Continue


YOUR CHOICE  
**EXIT**

Fig. 15c



Thursday, October 26, 1994

8:06 PM



# AIRLINE INFORMATION AND RESERVATIONS(continued)

## CREDIT CARD CHARGE

Amount: \$590.00		Delta Flight # 49	
One Way: Phoenix to Dulles Date: 11/25/94			
Departs: 8:00AM		Arrives: 3:07 PM Dinner	
American Express	Visa	Discover	Master Charge

Press on  
Credit Card You  
Want to Use:

Enter Your Credit Card Number:

2	1	7	7	7	3	5									
---	---	---	---	---	---	---	--	--	--	--	--	--	--	--	--

Enter Expiration Date (example 10/9/97):

Month:			Year:		
--------	--	--	-------	--	--

Press  Here to Erase Above and Repeat
Press  Here to Cancel Above and Exit
Press  Here to Confirm Above Charge




Fig. 15d

**DECLARATION FOR PATENT APPLICATION**

As below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names.

We believe we are the original, first and sole inventors of the subject matter which is claimed and for which a utility patent is sought on the invention entitled **ADVANCED SET TOP TERMINAL FOR CABLE TELEVISION DELIVERY SYSTEMS**, the specification of which was filed on \_\_\_\_\_, as Application Serial No. \_\_\_\_\_.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Eugene L. Johnson (Reg. No. 21,028), David N. Fronek (Reg. No. 25,678), Jon F. Tuttle (Reg. No. 25,713), Stuart R. Hemphill (Reg. No. 28,084), and Aldo Noto (Reg. No. 35,628).

Address all telephone calls to: Aldo Noto, (202) 452-6945

Address all correspondence to: Aldo Noto, Dorsey & Whitney, Suite 200, 1330 Connecticut Avenue, N.W., Washington, D.C. 20036.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

John S. Hendricks

Full name of sole or first inventor

  
Inventor's signature

Date 11/23/93

8723 Persimmon Tree Road, Potomac, MD 20854  
Residence

U.S.

Citizenship

8723 Persimmon Tree Road, Potomac, MD 20854  
Post Office Address

Alfred E. Bonner

Full name of second or joint inventor

  
Inventor's signature

Date 11/23/93

8300 Bradley Boulevard, Bethesda, MD 20817  
Residence


U.S.

Citizenship

8300 Bradley Boulevard, Bethesda, MD 20817  
Post Office Address

Richard E. Wunderlich

Full name of fourth or joint inventor

  
Inventor's signature

Date 11/24/93

290 Sweetbriar Court, Alpharetta, GA 30201  
Residence

U.S.

Citizenship

290 Sweetbriar Court, Alpharetta, GA 30201  
Post Office Address

Eric C. Berkobin

Full name of third or joint inventor

  
Inventor's signature

Date 11/24/93

108 Hillview Court, Woodstock, GA 30188  
Residence

U.S.

Citizenship

108 Hillview Court, Woodstock, GA 30188  
Post Office Address

**Associate Power Of Attorney Or Agent (37 CFR 1.34)  
(For Representation Related To A Patent Application)**

Docket No.  
**5915**

In Re Application Of: **John S. HENDRICKS et al.**

Serial No.  
**Not Yet Assigned**

Filing Date  
**Herewith**

Examiner

Group Art Unit

Invention: **TELEVISION TERMINAL DATA STORAGE**

**TO THE ASSISTANT COMMISSIONER FOR PATENTS:**


Please recognize the following as ☒ Associate Attorney ☐ Associate Agent in this application.

Name: **Matthew C. Phillips**

Reg. No.: **43,403**

Address: **DORSEY & WHITNEY LLP  
1001 Pennsylvania Avenue N.W.  
Suite 300 South  
Washington, D.C. 20004**

Tel. No. **(202)824-8800**



*Signature of Principal Attorney or Agent of Record*

Dated: **September 15, 1999**

**Aldo Noto  
Reg. No. 35,628  
DORSEY & WHITNEY LLP  
1001 Pennsylvania Avenue N.W.  
Suite 300 South  
Washington, D.C. 20004  
(202)824-8800**

*Registration Number & Address of Principal Attorney or Agent of Record*

I certify that this document is being deposited on  
with the U.S. Postal Service as first  
class mail under 37 C.F.R. 1.8 and is addressed to the  
Assistant Commissioner for Patents, Washington, D.C.  
20231.

*Signature of Person Mailing Correspondence*

*Typed or Printed Name of Person Mailing Correspondence*